


HVAC/R

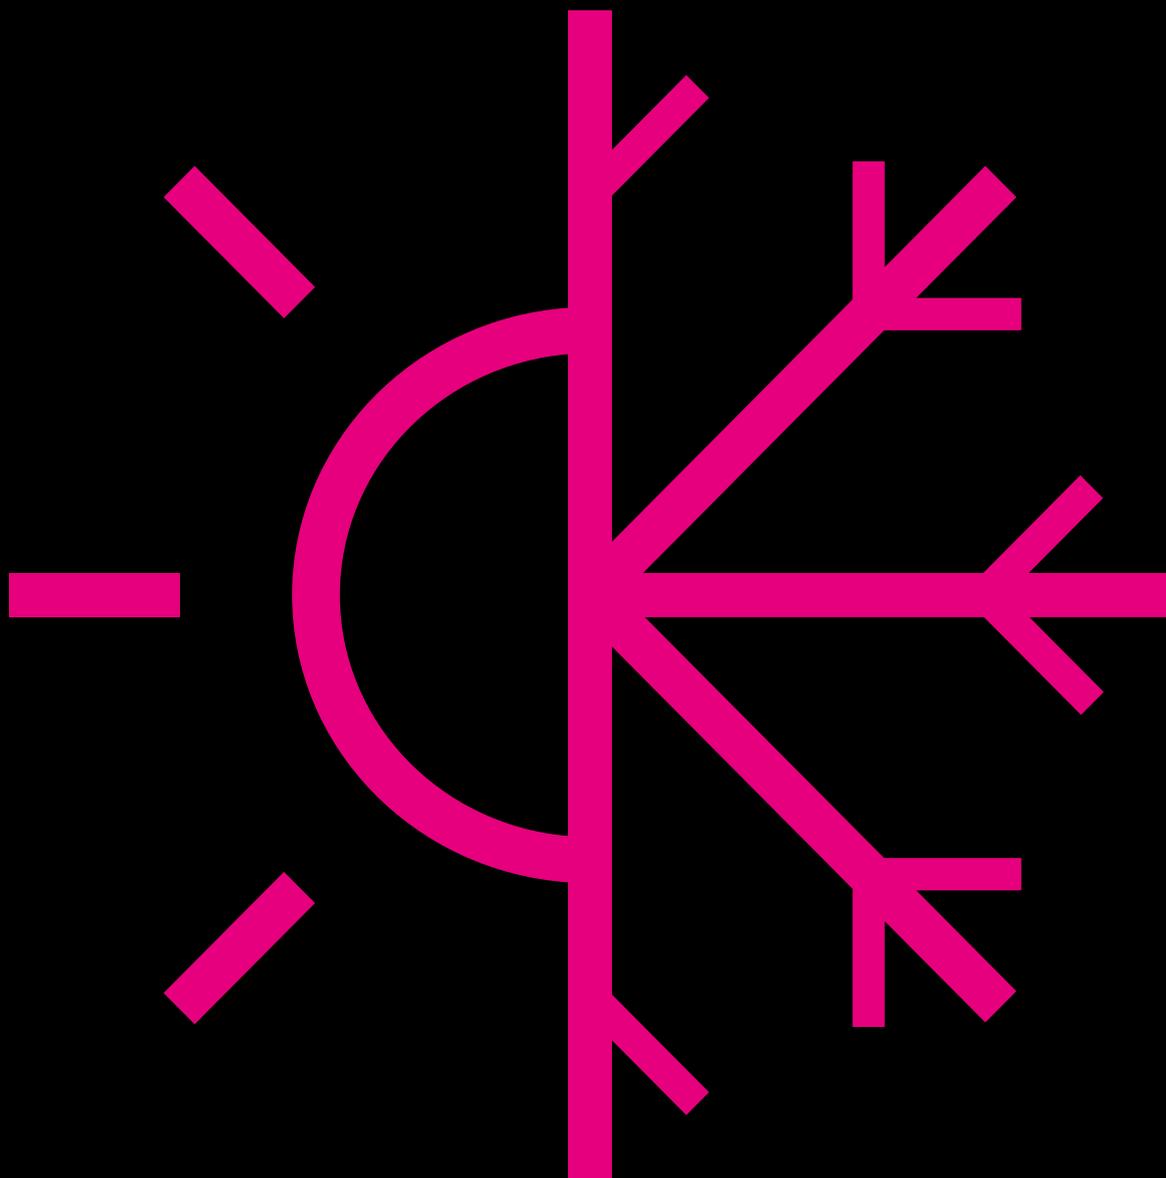

2023

Environmental Sustainability.

Not a destination.

A journey to experience.

Awarded for the second time as one of the 100 most sustainable Italian companies by Forbes, Errecom renews with the same enthusiasm its commitment to sustainability.

Increase in eco-friendly products in support of a circular economy.
Replacing plastic packaging with recycled cardboard.
Use of recycled plastic when the formulation allows it.
Dematerialisation of technical and information material.



THE EXCLUSIVE
1000 MIGLIA LINE



Excellence and Tradition

Errecom is now 1000 Miglia official partner. The same values. The same passion. A full range of excellent products that guarantees maximum efficiency to all air conditioning and refrigeration systems.

errecom.com

ERRECOM[®]
AIR CONDITIONING & REFRIGERATION CHEMICAL SOLUTIONS

The most beautiful and renowned race in the world, a **symbol of the success of "Made in Italy"** for almost 100 years.



Errecom has signed an **exclusive worldwide partnership** with 1000 Miglia which enhances its offer of chemicals and additives for AC/R maintenance used daily all over the world. The 1000 Miglia brand on the products **gives exclusivity and uniqueness to the service offered by the HVAC/R technician or shop.**




A full range of excellent products that guarantees maximum efficiency to all air conditioning and refrigeration systems.



The same emotions.
The same passion.

We are proud to announce that Errecom has been selected, thanks to its expertise and know-how, **as the official partner of 1000 Miglia to produce the exclusive AC/R maintenance and cleaning line.**

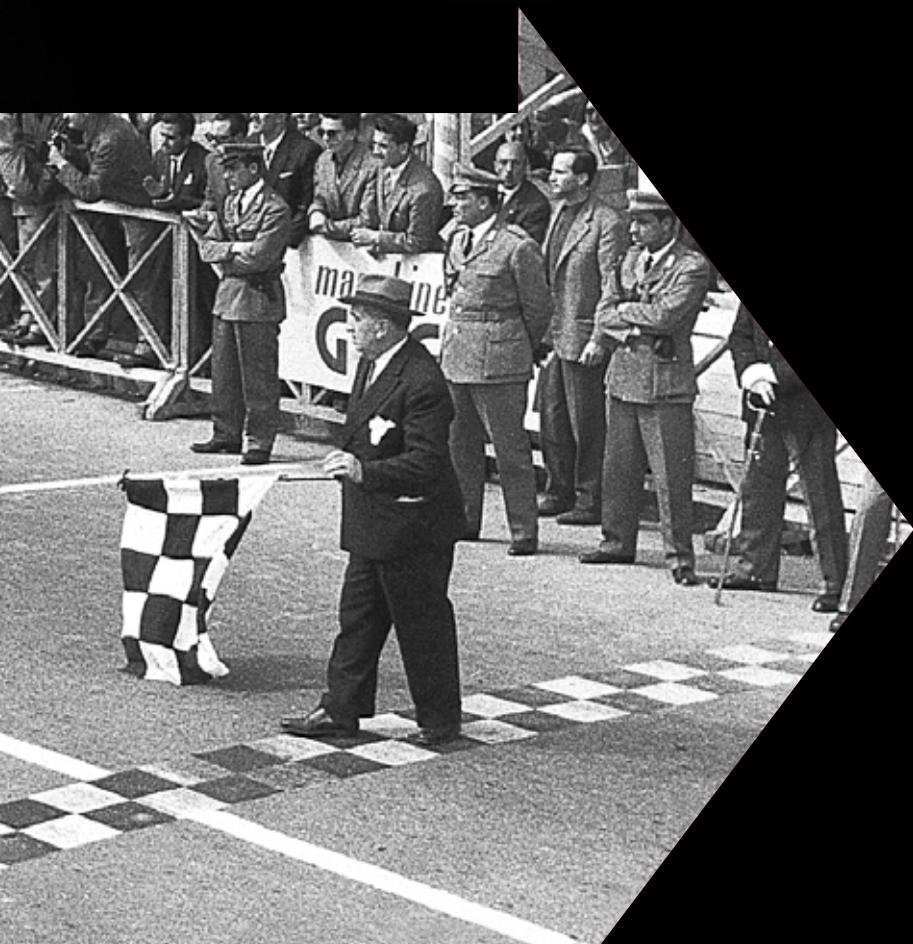

ENERGY DEMAND FROM AIR CONDITIONERS WILL TRIPLE BY 2050*



▣ **Natural gas** in Europe **costs** about **10 times more** than a year ago.

▣ Wholesale **electricity prices** are around **260% higher** than a year ago.**



How to cope with soaring **energy prices?**

Heat pump and AC/R
maintenance is the
answer.

Not just an intervention to solve AC/R system breakdowns: maintenance can also be performed to **prevent problems and maintain the efficiency of the system over time**, reducing its energy consumption and environmental impact.



ERRECOM
ROAD TO EFFICIENCY

EFFICIENCY?
IT'S A
MATTER OF
CHEMISTRY

What affects heat pump efficiency?

To name a few causes: refrigerant leaks, oil fouling, moisture, and dirty coils.

Air conditioning and refrigeration systems are not only a bunch of mechanical components but are composed of chemical elements too. For the system to work efficiently, it is essential to take care of the refrigerant gas and the refrigeration lubricant over time, avoiding their chemical decay.

Over 20 years of
experience and
research in AC/R
maintenance

Indoor Air Quality

People spend 90% of their time indoors, 2013 WHO Europe Report, US Environmental Protection Agency. Negligence in cleaning A/C systems not only reduces their efficiency but also negatively affects air quality by spreading viruses, bacteria, mould, and allergens. This can be a serious health hazard.

AC/R efficiency:

focus on maintenance, checkups, and leaks.

Errecom's offer includes:



What is it?

Acid neutraliser additive

How does it work?

It reduces and prevents the formation of acid residues resulting from the natural decomposition of refrigerant gas and refrigeration lubricant

What does it solve/prevent?

It prevents the acid residues from attacking the metal components of the system, causing refrigerant gas leaks and the AC/R compressor breakdown



What is it?

Anti-moisture additive

How does it work?

It surrounds the water molecules circulating in the AC/R system and, by removing them from the refrigeration lubricant, prevents the formation of acidity resulting from the interaction of excess water and lubricant. Working with the filter drier, the additive also slows down its saturation, thus extending its service life

What does it solve/prevent?

It prevents the corrosion caused by moisture



What is it?

Performance enhancer for A/C systems

How does it work?

It removes oil fouling from refrigeration lines

What does it solve/prevent?

Eliminating oil fouling from the internal walls of the refrigeration lines, the additive restores the original diameter of the pipes, the optimal heat exchange between the refrigerant gas and the refrigeration lines and the efficiency of the system



What is it?

Leak stop additive

How does it work?

It detects micro-leaks (up to 0.3 mm) on the metal, plastic and rubber components of the AC/R system by repairing them with mechanical action without reacting to moisture or oxygen (polymer-free formula)

What does it solve/prevent?

It repairs and prevents micro-leaks, preventing refrigerant from being spread into the atmosphere



What is it?

Antioxidant and anticorrosive additive

How does it work?

It leaves a thin film on the metal components (copper, aluminium, etc.) of the AC/R system protecting them from oxidation and corrosion without interfering with the heat exchange capacity

What does it solve/prevent?

It stops and prevents the oxidation and corrosion occurring within the AC/R system, extending the life of metal components

A broken AC/R compressor or a retrofitting procedure

requires checking on the air conditioning or refrigeration system. In this case of extraordinary maintenance, it is necessary to flush the AC/R system with a specific fluid that will remove:



carbonic and
hydrofluoric acid

moisture

metal ions
and oxides

However, these components can remain, in small percentages, free to circulate within the AC/R system causing the compressor to break down.

In addition, even after flushing with nitrogen,

residual flushing fluid

may remain, reducing the oil's viscosity and lubricating capacity.


The solution is

COMPRESSOR+

Add **Compressor+** to the compressor oil.



Eliminates acidity



Inactivates metal ions and oxides



Eliminates moisture



Restores the oil's lubricating capacity



If not used,

the life

of the A/C compressor

may be **drastically shortened**

Flushing Test


When should you flush an AC/R system?

How can you be sure that the system has been flushed correctly?

What is the right amount of flushing fluid to use?

Leaving **contaminants**, such as moisture, acidity, rust, dust, metal ions and oxides free to flow in the **refrigerant lines** can severely damage the components of AC/R systems.


Therefore, it is necessary to **remove** them through professional cleaning and flushing procedures. However, until now, this critical operation has been left to the experience and common sense of HVAC/R technicians, without the possibility of testing its success and result. Thanks to our know-how, this is now possible.



PATENT PENDING

Test to **verify the proper cleaning of condensers, evaporators, and refrigerant lines**

If the colour **CHANGES**,
FLUSH the system

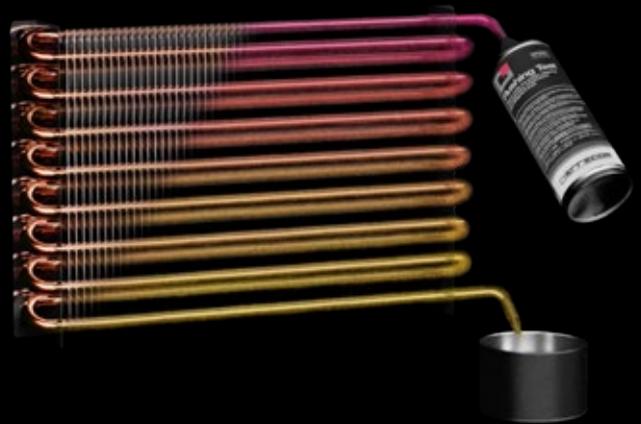

If the colour
DOESN'T CHANGE,
START the system




Clear and instant result.

Certifies
proper flushing

Steady

Adjustable Floor Support for AC/R Units



This new A/C support system
ensures quick and safe installation
of all outdoor units on any surface,
including sloping roofs up to 35°,
without additional support.



Height
adjustment:
16,5 – 25,5 cm

Can be tilted
up to 35°

360-degree
rotation



1500 Kg

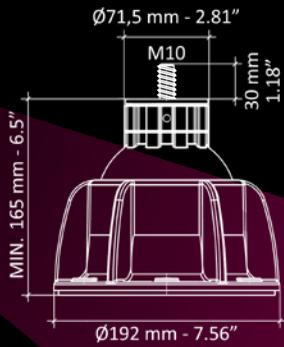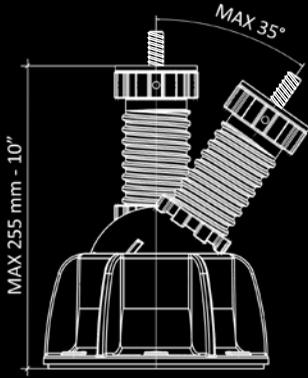

Universal,
solid,
eco-friendly.

PATENT PENDING



HOT WATER



RECIRCULATING WATER



COLD WATER



WATER RETURN



WATER SUPPLY





PIPE MARKERS AND LABELS

- ▶ Comply with
ISO 20560 and
CLP Regulation
 - ▶ Available in
several languages
 - ▶ Customisable
on request
- 


DISPLAY STAND

CUSTOM-MADE MODULAR
METAL DISPLAY STAND

according
to customer
requirements.

Errecom's graphic layout
has always been extremely
recognisable and distinctive
and now it will be even more:
the contrast between the black
display stand and the coloured
labels increases product
visibility and brand recognition.

Find out more





2050 mm

500 mm



2050 mm

500 mm



2050 mm

500 mm

Art.-Nr.	L (mm)
ES001	750
ES002	1000

Art.-Nr.	L (mm)	Hooks (pcs)
ES003	750	16
ES004	1000	20

Art.-Nr.	L (mm)	Hooks (pcs)
ES005	750	24
ES006	1000	30




SCENT DIFFUSION TECHNOLOGY



Heaven

Heaven is a scent diffuser designed to be connected to an existing HVAC system to provide powerful, constant, and efficient scenting. It can be programmed by the display or remotely via Wi-Fi. It can be easily installed in the false ceiling or directly in the AHU. Coverage can be up to 4000 SQM.

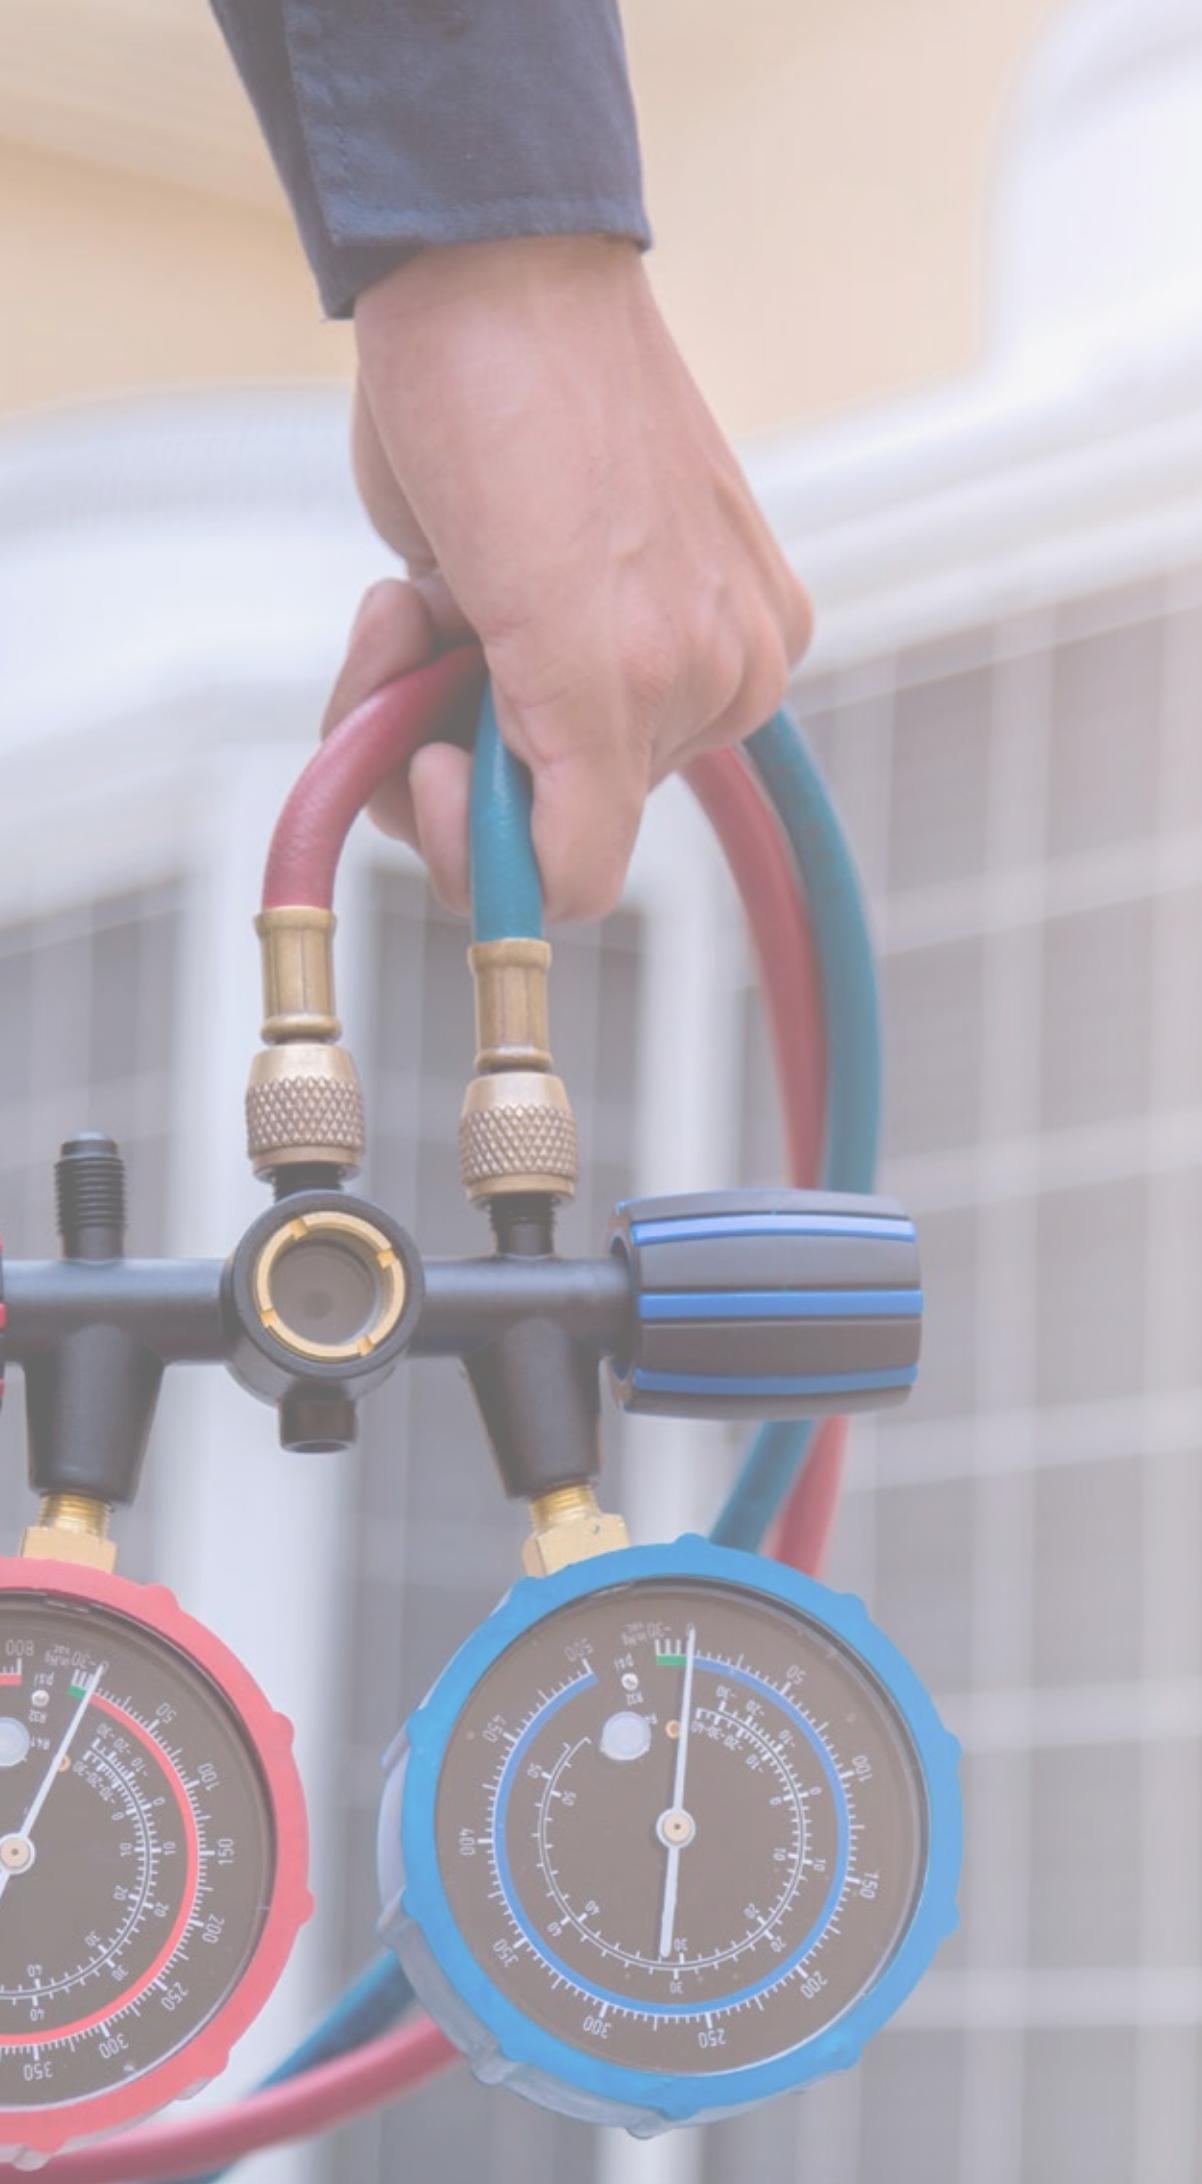

Extreme Ultra Leak Stop

- Permanently repairs leaks up to 0.3 mm on rubber and metal components of AC/R systems.
- Polymer-free: does not react with moisture and oxygen. Does not clog AC/R systems' components.
- Safe for metal and rubber components of AC/R systems.
- Visible when exposed to any UV lamp.
- Non-flammable, non-irritating, safe for the operator.
- Significantly reduces compressor noise.
- Compatible with all refrigeration lubricants.
- Compatible with all refrigerant gases, including CFC, HFC, HCFC, R32 and HFO, except R717 (ammonia).
- The professional choice for preventive maintenance.

Art.-Nr.	Adapters included	€			
TR1163.AL.01.S2	No adapters	-	30	5400	5400
TR1163.AL.H4.S2	1/4 SAE	-	30	5400	5400
TR1163.AL.H8.S2	5/16 SAE	-	30	5400	5400
TR1163.AL.H3.S2	1/4 SAE + 5/16 SAE	-	30	5400	5400

Dosage:

1 cartridge (6 mL - 0.2 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) of compressor oil.



6 mL



Cool-Shot Ultra Performance Enhancer for AC/R Systems

- Restores and maintains the original efficiency of AC/R systems.
- Removes oil fouling.
- Restores heat exchange in refrigeration lines.
- Increases the efficiency of the compressor lubricant without causing chemical changes.
- Extends compressor life and reduces its noise.
- Reduces the maintenance costs of AC/R systems.
- Reduces the energy consumption of the system and CO₂ emissions.
- Does not alter the refrigerant gas.
- Safe for all air conditioning and refrigeration systems.
- Visible when exposed to any UV lamp.
- Compatible with all refrigeration lubricants.
- Compatible with all refrigerant gases, including CFC, HFC, HCFC, R32 and HFO, except R717 (ammonia).
- The professional choice for preventive maintenance.

Art.-Nr.	Adapters included	€			
TR1170.AL.01.S2	No adapters	-	30	5400	5400
TR1170.AL.H4.S2	1/4 SAE	-	30	5400	5400
TR1170.AL.H8.S2	5/16 SAE	-	30	5400	5400
TR1170.AL.H3.S2	1/4 SAE + 5/16 SAE	-	30	5400	5400

Dosage:

1 cartridge (6 mL - 0.2 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) of compressor oil.



6 mL



Extreme Leak Stop

- It has the same characteristics as Extreme Ultra.

Dosage:

1 cartridge (30 mL - 1 fl oz) for systems up to 15 kW or 500 mL (16.9 fl oz) of compressor oil.
 1 cartridge (42 mL - 1.4 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) of compressor oil.
 1 cartridge (60 mL - 2 fl oz) for systems up to 30 kW or 1 L (33.8 fl oz) of compressor oil.

30 mL cartridge

Art.-Nr.	Description	€	👉	👉	👉
TR1062.C.01.S2	1-piece pack without adapters	-	24	1872	2160
TR1062.C.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	1872	2160
TR1062.C2.H3.S2	2-piece pack with 1/4 and 5/16 SAE adapters	-	-	-	-

42 mL cartridge

Art.-Nr.	Description	€	👉	👉	👉
TR1062.R.01.S2	1-piece pack without adapters	-	24	-	-
TR1062.R.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	-	-

60 mL cartridge

Art.-Nr.	Description	€	👉	👉	👉
TR1062.E.01.S2	1-piece pack without adapters	-	24	-	-
TR1062.E.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	-	-

240 mL cartridge

Art.-Nr.	Description	€	👉	👉	👉
TR1062.DQ.01	1-piece pack without adapters	-	06	2394	2394



30 42 60 mL



Cool-Shot Performance Enhancer for AC/R Systems

- It has the same characteristics as Cool-Shot Ultra.

Dosage:

1 cartridge (30 mL - 1 fl oz) for systems up to 15 kW or 500 mL (16.9 fl oz) of compressor oil.
 1 cartridge (42 mL - 1.4 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) of compressor oil.
 1 cartridge (60 mL - 2 fl oz) for systems up to 30 kW or 1 L (33.8 fl oz) of compressor oil.

30 mL cartridge

Art.-Nr.	Description	€	👉	👉	👉
TR1122.C.01.S2	1-piece pack without adapters	-	24	1872	2160
TR1122.C.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	1872	2160
TR1122.C2.H3.S2	2-piece pack with 1/4 and 5/16 SAE adapters	-	-	-	-

42 mL cartridge

Art.-Nr.	Description	€	👉	👉	👉
TR1122.R.01.S2	1-piece pack without adapters	-	24	-	-
TR1122.R.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	-	-

60 mL cartridge

Art.-Nr.	Description	€	👉	👉	👉
TR1122.E.01.S2	1-piece pack without adapters	-	24	-	-
TR1122.E.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	-	-

240 mL cartridge

Art.-Nr.	Description	€	👉	👉	👉
TR1122.DQ.01	1-piece pack without adapters	-	06	2394	2394



30 42 60 mL



A/C Maintenance Kit

AC/R System Maintenance Kit

The kit contains additives and tools to service air conditioning and refrigeration systems.

Available in different variants, it allows maintenance from a minimum of 32 systems (up to 15 kW or 500 mL of compressor oil) or 16 systems (up to 30 kW or 1 L of compressor oil).

The kit contains:

- A tool for inserting 240 mL cartridges into the system (Art.-Nr. IN1032.01 - Easy Gun).
- 1/4 SAE adapter (Art.-Nr. TB5203.01).
- 5/16 SAE adapter (Art.-Nr. TB5204.01).

Art.-Nr.	Description	€			
RK1603	With 1 Cartridge of Extreme	-	01	-	-
RK1604	With 4 Cartridges of Extreme	-	01	-	-
RK1605	With 1 Cartridge of Cool-Shot	-	01	-	-
RK1606	With 4 Cartridges of Cool-Shot	-	01	-	-
RK1607	With 1 Cartridge of Extreme and 3 Cartridges of Cool-Shot	-	01	-	-
RK1608	With 2 Cartridges of Extreme and 2 Cartridges of Cool-Shot	-	01	-	-
RK1609	With 3 Cartridges of Extreme and 1 Cartridge of Cool-Shot	-	01	-	-

OEM
APPROVED

ASHRAE 97
TESTED

NEWS 2023



Easy Gun Injection System for 240 mL Cartridges

EasyGun is Errecom's tool for inserting 240 mL cartridges of additives, UV leak detector dyes, and lubricants in AC/R systems.


Art.-Nr.	Description	€	🗑️
IN1032.01	Easy Gun	-	01
TB5203.01	1/4 SAE adapter	-	01
TB5204.01	5/16 SAE adapter	-	01



Plastic Straight Adapters


Art.-Nr.	Description	€	🗑️
TB5166.01	Flex Hose Ⓐ	-	50
RV2024.S1	1/4 SAE adapter Ⓛ	-	30
RV2025.S1	5/16 SAE adapter Ⓜ	-	30
RK1425.S1	Pack containing Ⓐ + Ⓛ	-	01
RK1426.S1	Pack containing Ⓐ + Ⓜ	-	01
RK1427.S1	Pack containing Ⓐ + Ⓛ + Ⓜ	-	01
RV2021.01*	5/16 SAE aluminium adapter Ⓝ	-	20

*Available while stocks last

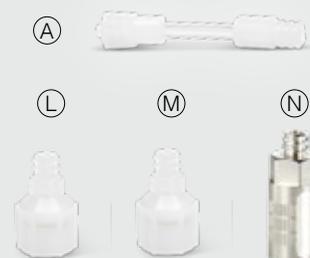

Plastic Flexible Adapters

Art.-Nr.	Description	€	🗑️
TB5067.R1	1/4 SAE adapter Ⓞ	-	20
TB5068.R1	5/16 SAE adapter Ⓟ	-	20
RK1290	Pack containing Ⓞ + Ⓟ	-	20

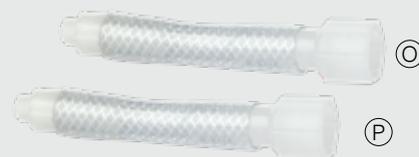

Plastic Straight Adapters with Metal Valve

Art.-Nr.	Description	€	🗑️
TB5022.01	1/4 SAE adapter Ⓠ	-	20
TB5023.01	5/16 SAE adapter Ⓡ	-	20
RK1228	Pack containing Ⓠ + Ⓡ	-	01



Super-Dry Ultra

Anti-moisture Additive

- Permanently eliminates moisture build-up inside AC/R systems thanks to the special chemical formula that extracts water from the refrigeration lubricant.
- Does not alter refrigerant gases.
- Safe for gaskets and system components, and the compressor.
- Does not weaken the power of the system, nor does it alter its performance.
- Compatible with all refrigeration lubricants.
- Compatible with all refrigerant gases, including CFC, HFC, HCFC, R32 and HFO, except R717 (ammonia).
- The professional choice for preventive maintenance: eliminating moisture, it inhibits acid formation over time.

Art.-Nr.	Adapters included	€			
TR1174.AL.01.S2	No adapters	-	30	5400	5400
TR1174.AL.H4.S2	1/4 SAE	-	30	5400	5400
TR1174.AL.H8.S2	5/16 SAE	-	30	5400	5400
TR1174.AL.H3.S2	1/4 SAE + 5/16 SAE	-	30	5400	5400

Dosage:

1 cartridge (6 mL - 0.2 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) of compressor oil.



6 mL



No-Acid Ultra

Acid Neutraliser Additive

- Eliminates all acid contaminants (caused by the decay of refrigerant gas or lubricant, the interaction between the extra moisture and the lubricant, or the compressor failure) from AC/R systems.
- Prevents compressor breakdown.
- Safe for system components.
- Compatible with all refrigeration lubricants.
- Compatible with all refrigerant gases, including CFC, HFC, HCFC, R32 and HFO, except R717 (ammonia).
- The professional choice for preventive maintenance: it prevents acid from developing over time.

Art.-Nr.	Adapters included	€			
TR1175.AL.01.S2	No adapters	-	30	5400	5400
TR1175.AL.H4.S2	1/4 SAE	-	30	5400	5400
TR1175.AL.H8.S2	5/16 SAE	-	30	5400	5400
TR1175.AL.H3.S2	1/4 SAE + 5/16 SAE	-	30	5400	5400

Dosage:

1 cartridge (6 mL - 0.2 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) compressor oil.



6 mL



Super-Dry

Anti-moisture Additive

- It has the same characteristics as Super-Dry Ultra.

Dosage:

1 cartridge (30 mL - 1 fl oz) for systems up to 15 kW or 500 mL (16.9 fl oz) of compressor oil.
 1 cartridge (42 mL - 1.4 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) of compressor oil.
 1 cartridge (60 mL - 2 fl oz) for systems up to 30 kW or 1 L (33.8 fl oz) of compressor oil.

30 mL cartridge

Art.-Nr.	Description	€			
TR1132.C.01.S2	1-piece pack without adapters	-	24	1872	2160
TR1132.C.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	1872	2160
TR1132.C2.H3.S2	2-piece pack with 1/4 and 5/16 SAE adapters	-	-	-	-

42 mL cartridge

Art.-Nr.	Description	€			
TR1132.R.01.S2	1-piece pack without adapters	-	24	-	-
TR1132.R.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	-	-

60 mL cartridge

Art.-Nr.	Description	€			
TR1132.E.01.S2	1-piece pack without adapters	-	24	-	-
TR1132.E.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	-	-



30 42 60 mL



No-Acid

Acid Neutraliser Additive

- It has the same characteristics as No-Acid Ultra.

Dosage:

1 cartridge (30 mL - 1 fl oz) for systems up to 15 kW or 500 mL (16.9 fl oz) of compressor oil.
 1 cartridge (42 mL - 1.4 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) of compressor oil.
 1 cartridge (60 mL - 2 fl oz) for systems up to 30 kW or 1 L (33.8 fl oz) of compressor oil.

30 mL cartridge

Art.-Nr.	Description	€			
TR1124.C.01.S2	1-piece pack without adapters	-	24	1872	2160
TR1124.C.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	1872	2160
TR1124.C2.H3.S2	2-piece pack with 1/4 and 5/16 SAE adapters	-	-	-	-

42 mL cartridge

Art.-Nr.	Description	€			
TR1124.R.01.S2	1-piece pack without adapters	-	24	-	-
TR1124.R.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	-	-

60 mL cartridge

Art.-Nr.	Description	€			
TR1124.E.01.S2	1-piece pack without adapters	-	24	-	-
TR1124.E.H3.S2	1-piece pack with 1/4 and 5/16 SAE adapters	-	24	-	-



30 42 60 mL



Antioxidant Ultra

Antioxidant and Anticorrosive Additive

- Creates a protective barrier on metals such as copper or aluminium, blocking and preventing oxidation and corrosion.
- Does not alter the refrigerant gas.
- Stabilises the refrigerant gas and the refrigeration lubricant.
- Safe for compressor, gaskets and system components.
- Does not weaken the power of the system and does not alter its performance.
- Does not decrease heat exchange.
- Does not accumulate in the moisture filter.
- Compatible with all refrigeration lubricants.
- Compatible with all refrigerant gases, including CFC, HFC, HCFC, R32 and HFO, except R717 (ammonia).

Art.-Nr.	Adapters included	€			
TR1177.AL.01.S2	No adapters	-	30	5400	5400
TR1177.AL.H4.S2	1/4 SAE	-	30	5400	5400
TR1177.AL.H8.S2	5/16 SAE	-	30	5400	5400
TR1177.AL.H3.S2	1/4 SAE + 5/16 SAE	-	30	5400	5400

Dosage:

1 cartridge (6 mL - 0.2 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) of compressor oil.



6 mL



Compressor+

Restoring Additive for Refrigeration Lubricants

- Restores the optimal working conditions of air conditioning and refrigeration systems after replacing the compressor or flushing the circuit.
- Eliminates and neutralises all particles and contaminants that are potentially hazardous to newly flushed system components. These include moisture, heavy flushing fluid residues, and contaminants such as hydrofluoric, hydrochloric, and carbonic acids that develop as a result of the decay of refrigerant gas and lubricant caused by the high temperatures reached by the compressor in case it burns or fails.
- Eliminates the risk of circuit damage after the compressor replacement or circuit flushing.
- Safe for AC/R system components.
- Compatible with all refrigeration lubricants.
- Compatible with all refrigerant gases, including CFC, HFC, HCFC, R32 and HFO, except R717 (ammonia).

Art.-Nr.	Description	€			
TR1162.AL.01.S2	6 mL cartridge	-	30	5400	5400
TR1162.L.01.S2	12 mL cartridge	-	30	5400	5400
TR1162.C.01.S2	30 mL cartridge	-	24	1872	2160
TR1162.QC.01.S2	45 mL cartridge	-	24	-	-
TR1162.E.01.S2	60 mL cartridge	-	24	-	-

Dosage:

Amount of Compressor+ to be added in the new compressor lubricant.

Compressor+	6 mL	12 mL	30 mL	45 mL	60 mL
Lubricant	up to 400 mL	up to 800 mL	up to 2 L	up to 3 L	up to 4 L


6 mL



Acid-Test

Test to Verify the Presence of Acid in Compressor Oil

- Universal: works with all refrigeration lubricants (POE - ABZ - PAO - PAG - PVE - Mineral).
- Easy to use: just add a few drops of lubricant, shake the bottle and wait a few seconds to see the result.
- Quick result in a few seconds.
- Ideal to perform regular preventive maintenance of the compressor.
- Non-flammable and non-toxic.
- Contains 4 test kits.
- Clear and accurate results. The colour indicates the pH range:

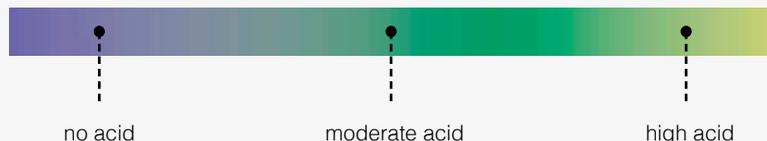

Art.-Nr.	€			
RK1349.S1	-	12	2160	2160



AC/R Restoring Treatment

Restoring Treatment to permanently repair Refrigerant Gas Leaks of AC/R Systems

- Permanently blocks the development of chemical reactions that would cause leaks, preserving the efficiency of air conditioning or refrigeration systems over time.
- Specifically:
 - eliminates moisture;
 - neutralises acid residues;
 - removes oil fouling;
 - permanently repairs refrigerant gas leaks;
 - restores the original efficiency of the system.
- Compatible with all refrigeration lubricants.
- Compatible with all refrigerant gases, including CFC, HFC, HCFC, R32 and HFO except R717 (ammonia).
- 4 steps: 4 cartridges (24 mL - 0.8 fl oz) for systems up to 21 kW or 700 mL (23.6 fl oz) compressor oil.
- Ideal to perform regular preventive maintenance.
- Recommended for restoring the efficiency of unkept systems.



Art.-Nr.	Adapters included	€			
RK1421.S2	No adapters	-	12	672	888
RK1421.H4.S2	1/4 SAE	-	12	672	888
RK1421.H8.S2	5/16 SAE	-	12	672	888
RK1421.H3.S2	1/4 SAE + 5/16 SAE	-	12	672	888



6 mL



Easy-Inject

Tool for injecting Additives into the AC/R System

- Allows additives to be added to AC/R systems using refrigerant gas.
- Pump down not required.
- Eco friendly: re-usable.
- Safe for technicians and systems: check valve included.

Art.-Nr.	Description	€			
IN1030.R1	1/4 SAE	-	15	-	-
IN1031.R1	5/16 SAE	-	15	-	-

6 mL



Easy-Hose

Tool for inserting additives through AC/R system pressure

Connected directly to the high side port and Easy Inject, Easy Hose enables additives to be injected into AC/R systems without manifolds, but rather using the pressure of the system itself.

Art.-Nr.	Description	€	
TB5164.R2	1/4 SAE	-	01
TB5165.R2	5/16 SAE	-	01



Easy-Inject + Additives

Easy-Inject + Extreme Ultra

Art.-Nr.	Description	€			
RK1384	Easy-Inject 1/4 SAE + Extreme Ultra	-	20	-	-
RK1385	Easy-Inject 5/16 SAE + Extreme Ultra	-	20	-	-

Easy-Inject + Cool-Shot Ultra

Art.-Nr.	Description	€			
RK1404	Easy-Inject 1/4 SAE + Cool-Shot Ultra	-	20	-	-
RK1416	Easy-Inject 5/16 SAE + Cool-Shot Ultra	-	20	-	-


6 mL



FixQuick

Ultra-fast Leak Stop

- Ultra-fast: takes just 20 seconds to repair refrigerant gas leaks up to 1 mm.
- Pressure resistance:
 - 20 seconds to fix up to 20 bar (290 psi)
 - 20 minutes to fix up to 50 bar (725 psi)
- Resists up to 250°C (482°F).
- Easy to use: STEP 1 - liquid with brush; STEP 2 - powder.
- Can be used on metal and plastic components.
- Can be applied on flat, curved, horizontal or vertical surfaces.
- Ideal for urgent repairs.
- Ideal for repairs where welding cannot be carried out.
- Permanent result.
- Visible with any UV lamp: it allows you to pinpoint and check the condition of previous repairs.

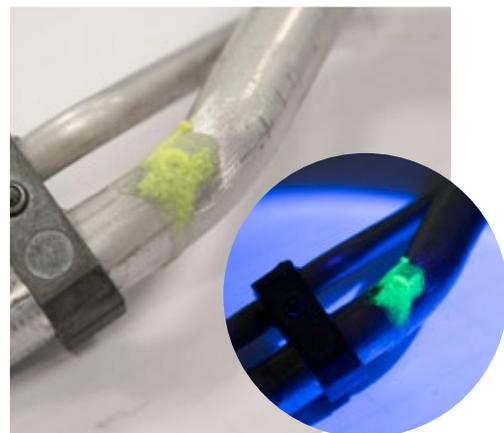


Art.-Nr.	€			
TR1180.01	-	30	-	-



External

Two-component Putty Leak Stop

- Repairs refrigerant gas leaks up to 5 mm.
- Ideal for urgent repairs.
- Perfectly adheres to metal (copper, aluminium, and steel) and rubber components.
- Can be used on thermoplastic pipes.
- Resists refrigeration lubricant (mineral, POE, PAG, PAO and Alkylbenzene).
- Resists refrigerant gases (CFC, HFC, HCFC, CO₂, including R32 and R1234yf).
- Resists additives and flushing fluids, including chlorinated ones.
- Temperature range use: -100°C to +270°C (-148 °F to 518 °F).
- Can be used on either the high or low side of HVAC/R systems.
- Different pressure resistance depending on the size of the leak:
 - 5 mm = 40 bar (580 psi) - 2 mm = 50 bar (725 psi) - 1 mm = 57 bar (826 psi).
- Easy to use: it can be easily mixed by using two fingers and, once applied, it permanently repairs the leak in 4-5 hours.
- There is no risk of product dispersion in AC/R systems.
- Once dried, it can be easily sanded or removed.

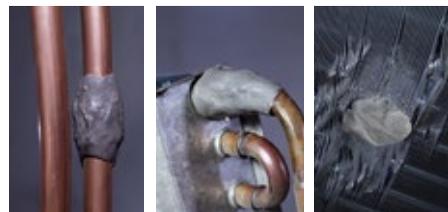

EXTERNAL P is the two-component putty leak stop specially formulated for plastic components of air conditioning and refrigeration systems and plumbing applications.

Art.-Nr.	Description	€			
TR1166.01	External	-	60	-	-
TR1172.01	External P	-	60	-	-



Extreme Ultra White

Leak Stop for Refrigerators

- It has the same characteristics as Extreme Ultra.
- Specific for compressors of domestic and industrial refrigerators, wine cellars, vending machines, ice cream display cabinets, etc., operating with R600, R290 and R134a.

Dosage: 1 dose (6 mL - 0.2 fl oz) per 200 mL (6.7 fl oz) of compressor oil.

Cartridge:

Art.-Nr.	Description	€			
TR1176.AL.01.S2	No adapters	-	30	5400	5400
TR1176.AL.H4.S2	1/4 SAE	-	30	5400	5400

Aerosol Can with Push&Fill System: Available in three different formats, each compatible with a specific refrigerant: R600, R290 or R134a.

Art.-Nr.	System	Description	€			
PF1185.Y.01.S2	R600	No adapters	-	25	3150	3600
PF1185.Y.H4.S2	R600	1/4 SAE	-	25	3150	3600
PF1186.Y.01.S2	R290	No adapters	-	25	3150	3600
PF1186.Y.H4.S2	R290	1/4 SAE	-	25	3150	3600
PF1187.Y.01.S2	R134a	No adapters	-	25	3150	3600
PF1187.Y.H4.S2	R134a	1/4 SAE	-	25	3150	3600

REFRIGERATOR
ONLY

 6 mL



Cool-Shot Ultra White

Performance Enhancer for Refrigerators

- It has the same characteristics as Cool-Shot Ultra.
- Specific for compressors of domestic and industrial refrigerators, wine cellars, vending machines, ice cream display cabinets, etc., operating with R600, R290 and R134a.

Dosage: 1 dose (6 mL - 0.2 fl oz) per 200 mL (6.7 fl oz) of compressor oil.

Cartridge:

Art.-Nr.	Description	€			
TR1181.AL.01.S2	No adapters	-	30	5400	5400
TR1181.AL.H4.S2	1/4 SAE	-	30	5400	5400

Aerosol Can with Push&Fill System: Available in three different formats, each compatible with a specific refrigerant: R600, R290 or R134a.

Art.-Nr.	System	Description	€			
PF1188.Y.01.S2	R600	No adapters	-	25	3150	3600
PF1188.Y.H4.S2	R600	1/4 SAE	-	25	3150	3600
PF1189.Y.01.S2	R290	No adapters	-	25	3150	3600
PF1189.Y.H4.S2	R290	1/4 SAE	-	25	3150	3600
PF1190.Y.01.S2	R134a	No adapters	-	25	3150	3600
PF1190.Y.H4.S2	R134a	1/4 SAE	-	25	3150	3600

REFRIGERATOR
ONLY

  6 mL



Super-Dry Ultra White

Anti-moisture Additive for Refrigerators

- It has the same characteristics as Super-Dry Ultra.
- Specific for compressors of domestic and industrial refrigerators, wine cellars, vending machines, ice cream display cabinets, etc., operating with R600, R290 and R134a.

Dosage: 1 dose (6 mL - 0.2 fl oz) per 200 mL (6.7 fl oz) of compressor oil.

Art.-Nr.	Description	€			
TR1182.AL.01.S2	No adapters	-	30	5400	5400
TR1182.AL.H4.S2	1/4 SAE	-	30	5400	5400

REFRIGERATOR
ONLY



6 mL



No-Acid Ultra White

Acid Neutraliser Additive for Refrigerators

- It has the same characteristics as No-Acid Ultra.
- Specific for compressors of domestic and industrial refrigerators, wine cellars, vending machines, ice cream display cabinets, etc., operating with R600, R290 and R134a.

Dosage: 1 dose (6 mL - 0.2 fl oz) per 200 mL (6.7 fl oz) of compressor oil.

Art.-Nr.	Description	€			
TR1183.AL.01.S2	No adapters	-	30	5400	5400
TR1183.AL.H4.S2	1/4 SAE	-	30	5400	5400


REFRIGERATOR
ONLY



6 mL



Detecting Refrigerant Gas Leak in AC/R Systems

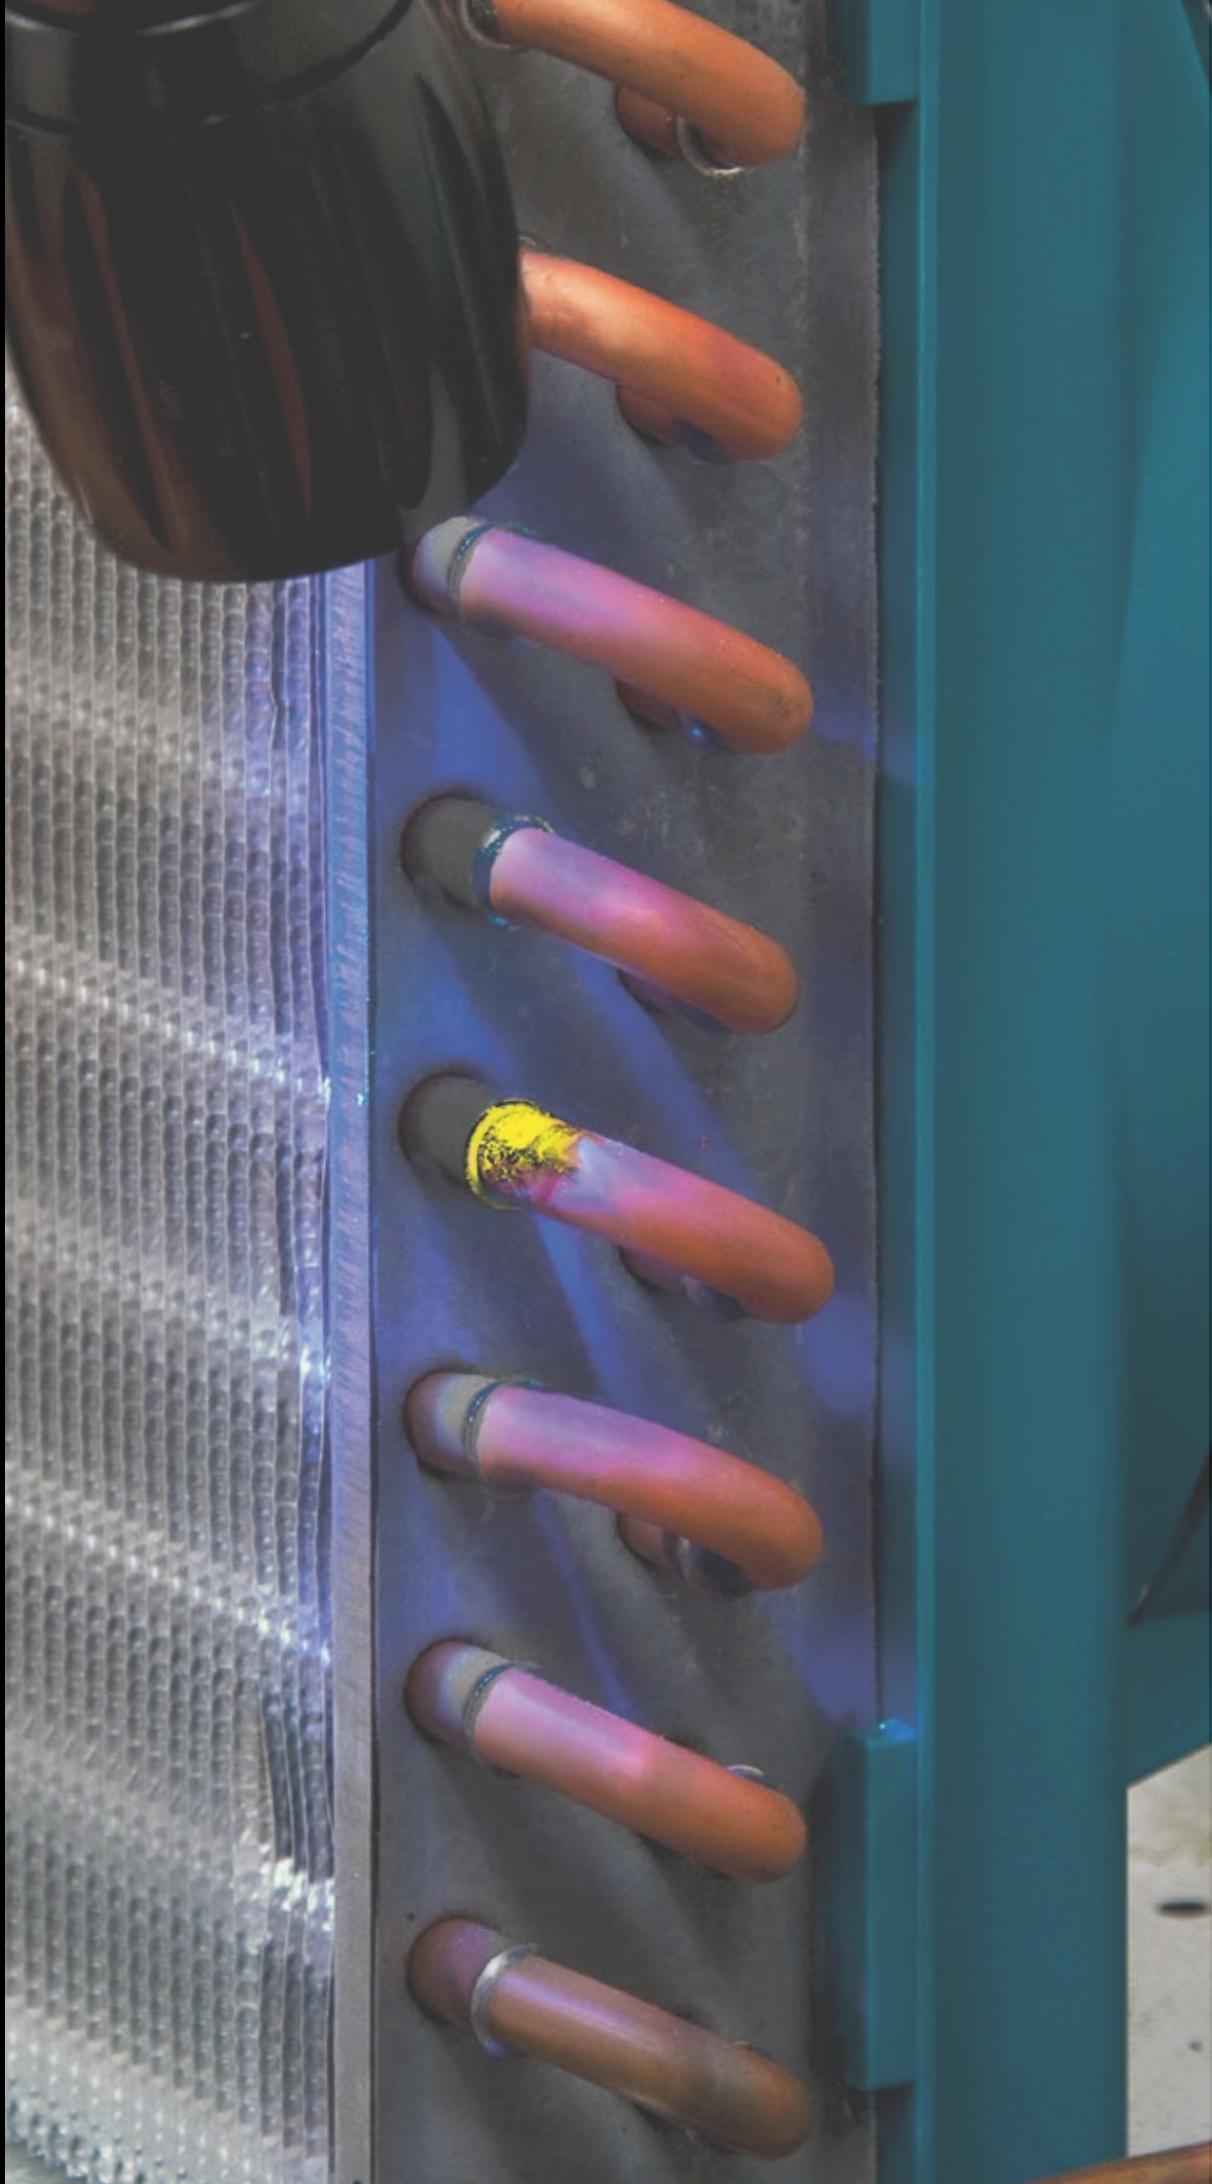

Best Bubbles

Refrigerant Gas Leak Detector

- Detects micro-leaks on A/C components and refrigerant lines thanks to its high adhesion power to surfaces.
- Quick, ready and easy to use: leaks result in the formation of large, thick bubbles.
- Operating temperature: from -40°C to +80°C (from -40°F to +176°F).
- Also available with directional dispensing trigger (A).
- The aerosol cans can be used even upside down thanks to the special 360° valve.

Art.-Nr.	Description	Quantity	€			
TR1143.K.S1	Best Bubbles	1 L	-	06	576	576
TR1143.M.01	Best Bubbles	500 mL	-	12	-	-
AB1232.N.01	Best Bubbles Aerosol	400 mL	-	12	1248	1404
AB1232.N.01.C	Best Bubbles Aerosol (A)	400 mL	-	12	1248	1404



Best Bubbles Fluo

Fluorescent Refrigerant Gas Leak Detector

- Detects micro-leaks on AC/R components and refrigerant lines thanks to its high adhesion power to surfaces.
- Quick, ready, and easy to use.
- Operating temperature: from -40°C to +80°C (from -40°F to +176°F).
- Ideal in poor visibility situations. Leaks result in large, thick, and fluorescent bubbles, visible when exposed to any UV lamp.
- Also available with directional dispensing trigger (A).
- The aerosol cans can be used even upside down thanks to the special 360° valve.

Art.-Nr.	Description	Quantity	€			
TR1161.K.S1	Best Bubbles Fluo	1 L	-	06	576	576
TR1161.M.01	Best Bubbles Fluo	500 mL	-	12	-	-
AB1251.N.01	Best Bubbles Fluo Aerosol	400 mL	-	12	1248	1404
AB1251.N.01.C	Best Bubbles Fluo Aerosol (A)	400 mL	-	12	1248	1404



Brilliant Remover

Fluorescent UV Dye Remover

- Removes residues of UV dye from surfaces and tools that may have been involved during the leak detection phase.
- Avoids any false leak localisations.
- Does not damage surfaces.

Art.-Nr.	Description	€			
TR1109.01	100 mL spray bottle	-	32	-	-
TR1108.K.S1	1 L spray bottle	-	06	576	576
TR1004.01	400 mL aerosol can	-	12	1248	1404



Brilliant

UV Leak Detector Dye for Air Conditioning and Refrigeration Systems

- Quickly and precisely locates refrigerant gas leaks in AC/R systems. Once inserted into the system, the product emerges from the leak and is visible when exposed to any UV lamp.
- Compatible with all lubricants and refrigerant gases including CFC, HFC, HCFC and HFO.
- Does not contain solvents.
- Does not alter the chemical properties of the lubricant and does not damage AC/R systems.
- 1 cartridge (7.5 mL – 0.25 fl oz) per 500 mL (16.9 fl oz) of compressor lubricant.
- Dye detected labels included.

12-cartridges pack (7,5 mL each)

Art.-Nr.	Adapters included	€			
TR1068.A12.01.S2	No adapters	-	12	672	888
TR1068.A12.H4.S2	1/4 SAE	-	12	672	888
TR1068.A12.H8.S2	5/16 SAE	-	12	672	888
TR1068.A12.H3.S2	1/4 SAE + 5/16 SAE	-	12	672	888

1-cartridge pack (60 mL)

Art.-Nr.	Adapters included	€			
TR1068.E.01	No adapters	-	15	-	-
TR1068.E.H4	1/4 SAE	-	15	-	-
TR1068.E.H8	5/16 SAE	-	15	-	-
TR1068.E.H3	1/4 SAE + 5/16 SAE	-	15	-	-

90 mL bottle

Art.-Nr.	€			
TR1003.NT.S1	-	24	-	-

250 mL bottle with dispenser

Art.-Nr.	€			
TR1003.01.S1	-	12	1512	1680

1-cartridge pack (240 mL)

Art.-Nr.	€			
TR1003.DQ.01	-	06	2394	2394



Trace Brilliant

Red Leak Detector for Air Conditioning and Refrigeration Systems

- Precisely locates refrigerant gas leaks with recognisable red marks.
- Visible through the ice.
- Does not evaporate and does not develop deposits.
- 1 cartridge (7.5 mL - 0.25 fl oz) per 500 mL (16.9 fl oz) of compressor lubricant.
- Compatible with all lubricants and refrigerant gases including CFC, HFC, HCFC, HFO.

12-cartridges pack (7,5 mL each)

Art.-Nr.	Adapters included	€			
TR1133.A12.01.S2	No adapters	-	12	672	888
TR1133.A12.H4.S2	1/4 SAE	-	12	672	888
TR1133.A12.H8.S2	5/16 SAE	-	12	672	888
TR1133.A12.H3.S2	1/4 SAE + 5/16 SAE	-	12	672	888

1-cartridge pack (60 mL)

Art.-Nr.	Adapters included	€			
TR1133.E.01	No adapters	-	15	-	-
TR1133.E.H4	1/4 SAE	-	15	-	-
TR1133.E.H8	5/16 SAE	-	15	-	-
TR1133.E.H3	1/4 SAE + 5/16 SAE	-	15	-	-

90 mL bottle

Art.-Nr.	€			
TR1133.NT.S1	-	24	-	-

250 mL bottle with dispenser

Art.-Nr.	€			
TR1133.01.S1	-	12	1512	1680

1-cartridge pack (240 mL)

Art.-Nr.	€			
TR1133.DQ.01	-	06	2394	2394



Flexible Bright Torch

FLEXIBLE BRIGHT TORCH is a 5-LED UV dual-head lamp with a flexible probe that allows identifying refrigerant gas leaks even in the most difficult to illuminate spots. Mount the UV head directly on the lamp or via the probe.

Technical features:

- Power supply: 3 x 1.5 V "AA" batteries. ■ UV protective goggles included.
- LED wavelength: 385 - 380 nm. ■ 5 white LED head. ■ Aluminium body. ■ Clamshell.

Art.-Nr.	€	
RK1267	-	05



Wire Bright Torch

WIRE BRIGHT TORCH is an UV lamp 100W-12V that allows identifying refrigerant gas leaks.

Technical features:

- Power supply: 12 V. ■ UV protective goggles included. ■ LED wavelength: 410 - 405 nm.
- Plastic body.

Art.-Nr.	€	
RK1231	-	01



High Bright Torch

HIGH BRIGHT TORCH is a 1-LED UV - 3W lamp to identify refrigerant gas leaks.

Technical features:

- Power supply: 3 x 1.5 V "C" batteries. ■ UV protective goggles included.
- LED wavelength: 410 - 405 nm. ■ Aluminium body. ■ Clamshell.

Art.-Nr.	€	
RK1269	-	05



Adjustable Focus Bright Torch

ADJUSTABLE FOCUS BRIGHT TORCH is a 1-LED UV - 3W lamp to identify refrigerant gas leaks.

Technical features:

- Power supply: 2 x 1.5 V "C" batteries. ■ UV protective goggles included.
- LED wavelength: 410 - 405 nm. ■ Aluminium body. ■ Case.

Art.-Nr.	€	
RK1294	-	01



Mini Bright Torch

MINI BRIGHT TORCH is a 9-LED UV lamp to identify refrigerant gas leaks.

Technical features:

- Power supply: 3 x 1.5 V "AAA" batteries. ■ UV protective goggles included.
- LED wavelength: 410 - 405 nm. ■ Aluminium body. ■ Clamshell.

Art.-Nr.	€	
RK1230	-	14



UV Protective Goggles

These goggles are glasses that protect the eyes from UV radiation and must be worn when using any UV lamp to identify leaks. Their yellow colour will make the fluorescence of the UV dye even more visible.

Technical features:

Complies with EN166:2001 and EN170:2002.

Art.-Nr.	€	
UV1002.01	-	01



Leak Finder

The Kit contains:

- UV leak detector dye (250 mL bottle with dispenser).
- UV dye remover (100 mL spray bottle).
- Refillable 50 mL cartridge injector.
- R134a adapter (low pressure charging port) with 120 mm flex hose.
- 1/4 SAE and 5/16 SAE adapters with 120 mm flex hose.
- 9-Led UV lamp.
- UV goggles.
- 33 dye detection labels.

Art.-Nr.	Description	€	☑	☑
RK1312	Yellow UV leak detector dye (Brilliant)	-	01	-
RK1307	Green UV leak detector dye (Green Brilliant)	-	01	-



Fast Leak Finder

The Kit contains:

- UV leak detector dye (12 x 7.5 mL cartridges).
- UV dye remover (400 mL spray bottle).
- R134a adapter (low pressure charging port) with 120 mm flex hose.
- 1/4 SAE and 5/16 SAE adapters with 120 mm flex hose.
- 9-Led UV lamp.
- UV goggles.
- 12 dye detection labels.

Art.-Nr.	Description	€	☑	☑
RK1241	Yellow UV leak detector dye (Brilliant)	-	01	-
RK1273	Green UV leak detector dye (Green Brilliant)	-	01	-



Fast Leak Finder 2

The Kit contains:

- UV leak detector dye (12 x 7.5 mL cartridges).
- UV dye remover (400 mL aerosol can).
- R134a adapter (low pressure charging port) with 120 mm flex hose.
- 5-Led UV lamp with flexible probe.
- UV goggles.
- 12 dye detection labels.

Art.-Nr.	Description	€	☑	☑
RK1238	Yellow UV leak detector dye (Brilliant)	-	01	-
RK1298	Green UV leak detector dye (Green Brilliant)	-	01	-



Fast Leak Finder 3

The Kit contains:

- UV leak detector dye (250 mL bottle with dispenser).
- UV dye remover (100 mL spray bottle).
- Refillable 50 mL cartridge injector.
- R134a adapter (low pressure charging port) with 120 mm flex hose.
- 1-Led UV-3W lamp.
- UV goggles.
- 33 dye detection labels.

Art.-Nr.	Description	€	☑	☑
RK1355	Yellow UV leak detector dye (Brilliant)	-	01	-
RK1372	Green UV leak detector dye (Green Brilliant)	-	01	-



Fast Leak Finder 5

The Kit contains:

- UV leak detector dye (240 mL cartridge).
- A tool for inserting 240 mL cartridges into the system (Easy Gun).
- 1/4 SAE adapter.
- 5/16 SAE adapter.
- 9-Led UV lamp.
- UV goggles.
- 32 dye detection labels.



Art.-Nr.	Description	€	📦	🔧
RK1476	Yellow UV leak detector dye (Brilliant)	-	01	-

Refillable Cartridge Injector

- Refillable.
- 20 and 50 mL cartridge.
- Flexible plastic and metal adapter for 1/4 SAE and 5/16 SAE.
- Flexible plastic and metal adapter for R134a and R1234yf.
- Hose burst pressure: 60 bar (870 psi).
- Plastic case.

Art.-Nr.	Description	€	📦
IN1021.R1	20 mL + Plastic and Metal Adapter 1/4 SAE and 5/16 SAE ①	-	01
IN1022.R1	50 mL + Plastic and Metal Adapter 1/4 SAE and 5/16 SAE ①	-	01
IN1021.01	20 mL + Plastic and Metal Adapter R134a ②	-	01
IN1022.01	50 mL + Plastic and Metal Adapter R134a ②	-	01
RK1357	50 mL + Plastic and Metal Adapter R1234yf ③	-	01



Refillable Injector 60 mL

- Refillable.
- 60 mL cartridge.
- Ball valve 1/4 SAE swivel connection.
- 1/4 SAE male rear connection.
- Plastic case.

Art.-Nr.	€	📦
RK1523	-	01



Refillable Piston Injector

- Refillable.
- 60 mL cartridge.
- 1/4 SAE swivel connection.
- Low-pressure port for systems with R134a.
- Plastic case.

Art.-Nr.	€	📦
RK1155	-	01



Refillable Injector 7.5 mL

- Refillable.
- 2 Ball valves.
- 1/4 SAE male rear connection.
- 3/8 SAE female front connection.
- Adapter 3/8 SAE male x 1/4 SAE female.

Art.-Nr.	€	📦
RK1106	-	01



N₂H₂ Electronic Leak Detector

N₂H₂ ELECTRONIC LEAK DETECTOR is an electronic device designed to detect a 5% hydrogen (H₂) + 95% nitrogen (N₂) gas mixture and the following refrigerant gases: R134a - R410a - R407c - R1234yf - R32 - R404a - R502 - R600 - R290. This leak detector is equipped with a heated sensor and a microprocessor that guarantee an accurate and very precise signal. Thanks to the 3 sensitivity levels and the 7 LED three-colour visual display, this leak detector can guarantee the detection of leaks up to 5ppm (2gr/year).

Technical features:

- Semiconductor heated sensor.
- 40 cm stainless flexible probe.
- Operating temperature: from 0°C to 40°C.
- 3 sensitivity levels.
- Leak detection indicator with 7 LED three-colour visual scale.
- Detectable refrigerant gases:
R134a - R1234yf - R410a - R404a - R407c - R32 - R502 - R600 - R290.
- Compliant with SAE J1627 CE.
- Power source: 2 x C size alkaline batteries.
- Power supply: 3,3 V / 0,5 A.
- Plastic case (22,2 x 6,6 x 5,1 cm).
- Weight: 418 gr (battery included).

Art.-Nr.	€		
RK1335	-	01	-
AS1014.01	-	01	-
AS1015.01	-	01	-
AS1019.01	-	01	-



**SPARE PARTS AVAILABLE



RK1335

AS1019.01

N₂H₂ Pressure Kit HVAC/R

N₂H₂ PRESSURE KIT is a kit to detect leaks in air conditioning and refrigeration systems under pressure with nitrogen/hydrogen gas mixture (N₂H₂).

The kit includes:

- Gas pressure regulator (0-60 bar) compliant with EN ISO 2503 186588.
- 2 m charging hose SAE J2196/J2888 with ball valve with 1/4 SAE swivel connection.
- Black 1/4 SAE gauge with 15 cm hose and ball valve with gauge (Class 1.0) in scale sectors refrigerant gases R134a/R1234yf/R32/R410a/R404a/R407c/R422/R507/R22 and nitrogen/hydrogen mixture (N₂H₂).
- Green 5/16 SAE gauge with 15 cm hose and ball valve with gauge (Class 1.0) in scale sectors refrigerant gases R134a/R1234yf/R32/R410a/R404a/R407c/R422/R507/R22 and nitrogen/hydrogen mixture (N₂H₂).
- Disposable N₂H₂ cylinder 950cc - 110 bar.
- Adapter for disposable cylinder (M10x1 - W21,80 RHE).
- Storage and transport plastic case (44,7 x 41,2 x 10,7 cm).

Art.-Nr.	Description	€		
RK1526	N ₂ H ₂ Pressure Kit (IT)	-	01	-
RK1526.UK	N ₂ H ₂ Pressure Kit (UK)	-	01	-
RK1526.DE	N ₂ H ₂ Pressure Kit (DE)	-	01	-
RK1526.FR	N ₂ H ₂ Pressure Kit (FR)	-	01	-



N₂H₂ Detection Kit HVAC/R

N₂H₂ DETECTION KIT is a kit to detect leaks up to 5ppm (2gr/year) in air conditioning and refrigeration systems under pressure with nitrogen/hydrogen gas mixture (N₂H₂). The electronic leak detector is also able to detect the following refrigerant gases R134a - R410a - R407c - R1234yf - R32 - R404a - R502 - R600 - R290.

Technical features:

- Semiconductor heated sensor. ■ 40 cm stainless flexible probe. ■ Operating temperature: from 0°C to 40°C. ■ 3 sensitivity levels. ■ Leak detection indicator with 7 LED three-colour visual scale. ■ Detectable refrigerant gases: R134a - R1234yf - R410a - R404a - R407c - R32 - R502 - R600 - R290. ■ Compliant with SAE J1627 CE. ■ Power source: 2 x C size alkaline batteries. ■ Power supply: 3,3 V / 0,5 A.

The kit includes:

- Gas pressure regulator (0-60 bar) compliant with EN ISO 2503 186588.
- 2 m charging hose SAE J2196/J2888 with ball valve with 1/4 SAE swivel connection.
- Black 1/4 SAE gauge with 15 cm hose and ball valve with gauge (Class 1.0) in scale sectors refrigerant gases R134a/R1234yf/R32/R410a/R404a R407c/R422/R507/R22 and nitrogen/hydrogen mixture (N₂H₂).
- Green 5/16 SAE gauge with 15 cm hose and ball valve with gauge (Class 1.0) in scale sectors refrigerant gases R134a/R1234yf/R32/R410a/R404a R407c/R422/R507/R22 and nitrogen/hydrogen mixture (N₂H₂).
- Disposable N₂H₂ cylinder 950cc - 110 bar and adapter (M10x1 - W21.80 RH).
- Electronic leak detector.
- Plastic case (44,7 x 41,2 x 10,7 cm).

Art.-Nr.	Description	€	
RK1525	W21,7 x 1" 1/4 - UNI 4409 (IT)	-	01
RK1525.UK	G5/8" - BS 341 (UK)	-	01
RK1525.DE	W24,32 x 1" 1/4 - DIN 477 (DE)	-	01
RK1525.FR	Ø21,7 x 1,814 - NFE 29-650/C (FR)	-	01



R744 (CO₂) Electronic Leak Detector

R744 (CO₂) ELECTRONIC LEAK DETECTOR is an electronic device designed to detect R744 (CO₂). The leak detector is equipped with a microprocessor that guarantees an accurate and very precise signal. Thanks to the 3 sensitivity levels and the multi-colour visual display this leak detector can guarantee the detection of leaks up to 5gr/year.

Technical features:

- Semiconductor sensor.
- 40 cm stainless flexible probe.
- Operating temperature: from 0°C to 40°C.
- 3 sensitivity levels.
- Leak detection indicator: multi-colour visual display.
- Detectable refrigerant gas: R7444 (CO₂).
- Power source: 1 rechargeable 3.7 Vdc lithium battery.
- Power supply: 5.0 V / 1.0 A.
- Plastic case (22,4 x 7,1 x 5,4 cm).
- Weight: 416 gr (battery included).
- Auto-off: 10 minutes.

Art.-Nr.	€		
RK1456	-	01	-



N₂ Pressure Kit HVAC/R

N₂ PRESSURE KIT is a kit to detect leaks in air conditioning and refrigeration systems under pressure with nitrogen (N₂).

The kit includes:

- Gas pressure regulator (0-60 bar) compliant with EN ISO 2503 186588.
- 2 m charging hose SAE J2196/J2888 with ball valve with 1/4 SAE swivel connection.
- Black 1/4 SAE gauge with 15 cm hose and ball valve with gauge (Class 1.0) in scale sectors refrigerant gases R134a/R1234yf/R32/R410a/R404a/R407c/R422/R507/R22 and nitrogen (N₂).
- Green 5/16 SAE gauge with 15 cm hose and ball valve with gauge (Class 1.0) in scale sectors refrigerant gases R134a/R1234yf/R32/R410a/R404a/R407c/R422/R507/R22 and nitrogen (N₂).
- Disposable N₂ cylinder 950cc - 110 bar.
- Adapter for disposable cylinder (M10x1 - W21,80 RHE).
- Storage and transport plastic case (44,7 x 41,2 x 10,7 cm).



Art.-Nr.	Description	€		
RK1527	N ₂ Pressure Kit (IT)	-	01	-
RK1527.UK	N ₂ Pressure Kit (UK)	-	01	-
RK1527.DE	N ₂ Pressure Kit (DE)	-	01	-
RK1527.FR	N ₂ Pressure Kit (FR)	-	01	-

AC/R Systems Pressure Regulator & Tester

Pressure regulator technical features:

- Inlet pressure: max 200 bar.
- Outlet pressure: max 60 bar.
- 1/4 SAE male fitting.

The kit includes:

- 200 cm hose with 1/4 SAE ball valve.
- Ø 80 mm gauge with defined sectors and 1/4 SAE fitting.
- Adapter: 1/4 SAE male x 5/16 SAE female.



Art.-Nr.	Description	€		
RK1432.IT	W21,7 x 1"1/4 - UNI 4409 (IT)	-	01	-
RK1433.DE	W24,32 x 1"1/4 - DIN477 nr. 10 (DE)	-	01	-
RK1434.UK	G5/8" - BS 341 nr. 3 (UK)	-	01	-
RK1435.FR	Ø 21,7 x 1,814 - NF E 29-650/c (FR)	-	01	-

Leak Testing Gauges

- Ball valve with 1/4 SAE male fitting.
- Pressure gauge Ø 80 mm, class 1.0 with defined sectors, positioning indicator and adjusting screw.
- Black or green rubber protective shell.

Art.-Nr.	Description	€		
MN1062.01	1/4 SAE fitting	-	01	-
MN1063.01	5/16 SAE (R410a/R32) fitting	-	01	-



□ R744 (CO₂) Pressure Regulator

Technical features:

- Inlet pressure: max 300 bar.
- Outlet pressure: max 200 bar.
- 1/4 SAE male fitting.

Art.-Nr.	Description	€		
MN1125.01	Joint W21,7 x 1"1/4 - UNI 4409 (IT)	-	01	-



□ Nitrogen Pressure Regulator

Technical features:

- Inlet pressure: max 200 bar.
- Outlet pressure: max 60 bar.
- 1/4 SAE male fitting.

Art.-Nr.	Description	€		
RK1325.IT	Connection W21,7 x 1"1/4 - UNI 4409 (IT)	-	01	-
RK1280.DE	Connection W24,32 x 1"1/4 - DIN477 nr. 10 (DE)	-	01	-
RK1281.UK	Connection G5/8" - BS 341 nr. 3 (UK)	-	01	-
RK1282.FR	Connection Ø 21,7 x 1,814 - NF E 29-650/c (FR)	-	01	-



□ Nitrogen Pressure Regulator for Mini Cylinders

It is a pressure regulator for mini cylinders that contain nitrogen or nitrogen/hydrogen.

Technical features:

- Inlet pressure: max 110 bar.
- Outlet pressure: max 10 bar.
- Hose length: 200 cm.
- Fitting: 1/4 SAE swivel ball valve.

Art.-Nr.	€		
MN1020.01	-	01	-



□ N₂ (Nitrogen) and N₂H₂ (Nitrogen-Hydrogen) Cylinder

Disposable cylinders filled to a pressure of 110 bar.

Art.-Nr.	Description	€		
BG1005.01	N ₂ (Nitrogen) cylinder 950cc	-	12	-
BG1062.01	N ₂ H ₂ (Nitrogen-Hydrogen) cylinder 950cc	-	06	-
BG1069.01	N ₂ H ₂ (Nitrogen-Hydrogen) cylinder 2,2 L	-	12	-

Art.-Nr.	Description	€		
RP1029.01	W21,7 x 1"1/4 - UNI 4409 (IT)	-	01	-
RP1061.01	W24,32 x 1"1/4 - DIN477 nr. 10 (DE)	-	01	-
RP1062.01	G5/8" - BS 341 nr. 3 (UK)	-	01	-
RP1059.01	Ø 21,7 x 1,814 - NF E 29-650/c (FR)	-	01	-





POE Lubricants

ERRECOM's synthetic polyolester (POE) refrigeration lubricants are characterised by high thermal, chemical and hydrolytic stability. Due to their good miscibility, POE lubricants are compatible with all chlorine-free refrigerants, FC refrigerants, and with HFC refrigerants such as R134a, R404a, R507, R410a, R407c. ERRECOM's POE lubricants can also be used with hydrocarbon refrigerants such as propane (R290) and propylene (R1270).

Furthermore, their use has already been successfully tested with low-GWP refrigerants such as HFOs (e.g. R1234yf, R1234ze). Lastly, ERRECOM's POEs have also been tested with new refrigerants designed to replace R22, such as R422a/D and R417a. Our POE lubricants are recommended for use in hermetic, semi-hermetic and open compressors as well as screw compressors and turbochargers (depending on viscosity).

Due to their high viscosity indices, ERRECOM POEs have excellent cold flow properties and a highly stable lubricating film under high-temperature conditions in hydrocarbon applications. ERRECOM's POE lubricants are characterised by high stability and excellent lubrication. POEs are hygroscopic, which means that they tend to absorb water more quickly than non-polar hydrocarbon-based refrigeration oils such as mineral ones, alkyl benzene and PAO. Precisely for this reason, all ERRECOM POEs are ultra-dry and filled in plastic bottles and metal tanks specially designed to ensure protection against moisture.

Physical Quantity Measured (Unit of Measurement)	Analytical Reference Method	POE 22	POE 32	POE 46	POE 55	POE 68	POE 100	POE 170	POE 220
ISO VG	-	22	32	46	55	68	100	170	220
Kinematic Viscosity @ 40°C (cSt)	ASTM-D445	22	32	46	53,9	68	100	170	226,2
Kinematic Viscosity @ 100°C (cSt)	ASTM-D445	4,23	5,5	7,3	8,2	9,5	11,51	16,66	19,34
Viscosity Index	ASTM-D2270	130	140	140	123	140	110	100	97
Pour Point (°C)	ASTM-D97	-48	-50	-45	-42	-42	-36	-36	-30
Flash Point (°C)	ASTM-D93	250	230	230	240	234	300	300	318
Density @ 15°C (g/cm³)	ASTM-D1298	0,95	0,955	0,965	0,965	0,975	0,968	0,96	0,975
Moisture Level (ppm)	ASTM-D6304	50	50	50	50	50	75	75	75
Total Acid (mg KOH/g)	ASTM-D974	<0,03	<0,03	<0,03	<0,03	<0,03	<0,04	<0,04	<0,04

POE 22

Art.-Nr.	Qty.	€				Packaging
OL6011.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6011.M.P2	500 mL	-	12	972	1080	
OL6011.K.P2	1 L	-	12	756	756	
OL6011.UP.P2	1 Gal	-	02	196	196	
OL6011.I.P2	4 L	-	02	196	196	
OL6011.P.P2	5 L	-	02	140	140	
OL6011.K.01	1 L	-	12	672	672	Metal Tank
OL6011.P.01	5 L	-	02	152	152	
OL6011.UV	5 Gal	-	01	-	-	
OL6011.V	20 L	-	01	24	24	
OL6011.T	25 L	-	01	24	24	
OL6011.B	200 L	-	01	04	04	
OL6011.IBC	1000 L	-	01	-	-	IBC Cube

POE 46

Art.-Nr.	Qty.	€				Packaging
OL6015.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6015.M.P2	500 mL	-	12	972	1080	
OL6015.K.P2	1 L	-	12	756	756	
OL6015.UP.P2	1 Gal	-	02	196	196	
OL6015.I.P2	4 L	-	02	196	196	
OL6015.P.P2	5 L	-	02	140	140	
OL6015.K.01	1 L	-	12	672	672	Metal Tank
OL6015.P.01	5 L	-	02	152	152	
OL6015.UV	5 Gal	-	01	-	-	
OL6015.V	20 L	-	01	24	24	
OL6015.T	25 L	-	01	24	24	
OL6015.B	200 L	-	01	04	04	
OL6015.IBC	1000 L	-	01	-	-	IBC Cube

POE 68

Art.-Nr.	Qty.	€				Packaging
OL6016.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6016.M.P2	500 mL	-	12	972	1080	
OL6016.K.P2	1 L	-	12	756	756	
OL6016.UP.P2	1 Gal	-	02	196	196	
OL6016.I.P2	4 L	-	02	196	196	
OL6016.P.P2	5 L	-	02	140	140	
OL6016.K.01	1 L	-	12	672	672	Metal Tank
OL6016.P.01	5 L	-	02	152	152	
OL6016.UV	5 Gal	-	01	-	-	
OL6016.V	20 L	-	01	24	24	
OL6016.T	25 L	-	01	24	24	
OL6016.B	200 L	-	01	04	04	
OL6016.IBC	1000 L	-	01	-	-	IBC Cube

POE 170

Art.-Nr.	Qty.	€				Packaging
OL6020.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6020.M.P2	500 mL	-	12	972	1080	
OL6020.K.P2	1 L	-	12	756	756	
OL6020.UP.P2	1 Gal	-	02	196	196	
OL6020.I.P2	4 L	-	02	196	196	
OL6020.P.P2	5 L	-	02	140	140	
OL6020.K.01	1 L	-	12	672	672	Metal Tank
OL6020.P.01	5 L	-	02	152	152	
OL6020.UV	5 Gal	-	01	-	-	
OL6020.V	20 L	-	01	24	24	
OL6020.T	25 L	-	01	24	24	
OL6020.B	200 L	-	01	04	04	
OL6020.IBC	1000 L	-	01	-	-	IBC Cube

POE 32

Art.-Nr.	Qty.	€				Packaging
OL6012.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6012.M.P2	500 mL	-	12	972	1080	
OL6012.K.P2	1 L	-	12	756	756	
OL6012.UP.P2	1 Gal	-	02	196	196	
OL6012.I.P2	4 L	-	02	196	196	
OL6012.P.P2	5 L	-	02	140	140	
OL6012.K.01	1 L	-	12	672	672	Metal Tank
OL6012.P.01	5 L	-	02	152	152	
OL6012.UV	5 Gal	-	01	-	-	
OL6012.V	20 L	-	01	24	24	
OL6012.T	25 L	-	01	24	24	
OL6012.B	200 L	-	01	04	04	
OL6012.IBC	1000 L	-	01	-	-	IBC Cube

POE 55

Art.-Nr.	Qty.	€				Packaging
OL6055.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6055.M.P2	500 mL	-	12	972	1080	
OL6055.K.P2	1 L	-	12	756	756	
OL6055.UP.P2	1 Gal	-	02	196	196	
OL6055.I.P2	4 L	-	02	196	196	
OL6055.P.P2	5 L	-	02	140	140	
OL6055.K.01	1 L	-	12	672	672	Metal Tank
OL6055.P.01	5 L	-	02	152	152	
OL6055.UV	5 Gal	-	01	-	-	
OL6055.V	20 L	-	01	24	24	
OL6055.T	25 L	-	01	24	24	
OL6055.B	200 L	-	01	04	04	
OL6055.IBC	1000 L	-	01	-	-	IBC Cube

POE 100

Art.-Nr.	Qty.	€				Packaging
OL6017.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6017.M.P2	500 mL	-	12	972	1080	
OL6017.K.P2	1 L	-	12	756	756	
OL6017.UP.P2	1 Gal	-	02	196	196	
OL6017.I.P2	4 L	-	02	196	196	
OL6017.P.P2	5 L	-	02	140	140	
OL6017.K.01	1 L	-	12	672	672	Metal Tank
OL6017.P.01	5 L	-	02	152	152	
OL6017.UV	5 Gal	-	01	-	-	
OL6017.V	20 L	-	01	24	24	
OL6017.T	25 L	-	01	24	24	
OL6017.B	200 L	-	01	04	04	
OL6017.IBC	1000 L	-	01	-	-	IBC Cube

POE 220

Art.-Nr.	Qty.	€				Packaging
OL6021.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6021.M.P2	500 mL	-	12	972	1080	
OL6021.K.P2	1 L	-	12	756	756	
OL6021.UP.P2	1 Gal	-	02	196	196	
OL6021.I.P2	4 L	-	02	196	196	
OL6021.P.P2	5 L	-	02	140	140	
OL6021.K.01	1 L	-	12	672	672	Metal Tank
OL6021.P.01	5 L	-	02	152	152	
OL6021.UV	5 Gal	-	01	-	-	
OL6021.V	20 L	-	01	24	24	
OL6021.T	25 L	-	01	24	24	
OL6021.B	200 L	-	01	04	04	
OL6021.IBC	1000 L	-	01	-	-	IBC Cube

Refrigeration Lubricants

The Montreal Protocol bans CFCs and HCFCs aiming to protect the ozone layer while the Kyoto Protocol aims to reduce greenhouse gases and, thus, global warming. F-Gas II, on the other hand, aims to progressively reduce the use of HFCs and high GWP (global warming potential) refrigerants. These laws encourage the use of R744 (CO₂).

CO₂ - POE Lubricants

Carbon dioxide (R744) has been used as a refrigerant since the last century with the introduction of industrial refrigeration systems. R744 has excellent thermodynamic properties and is an environmentally friendly refrigerant (with the lowest GWP and ODP). Its use has grown as it is not only a natural refrigerant but also extremely effective, both in specially designed industrial systems such as supermarket refrigerators and heat pump water heaters. Errecom's CO₂ - POE lubricants are high-performance polyol ester-based synthetic lubricants specially developed for CO₂ applications. CO₂ - POEs are available in 5 different viscosity grades to meet the requirements of a full range of R744 systems. They are characterised by good miscibility, fluidity, and stability. Thanks to their branched molecular structure and the high-performance additive package included in the formulation, they also provide good lubrication with better overall performance than classic POEs over a wide temperature range.

More precisely, Errecom's CO₂ - POE lubricants contain excellent additive packages (anti-oxidants, anti-corrosives, anti-foaming) carefully selected to: optimise miscibility with CO₂, thus increasing heat exchange even in the low-temperature zone;

- reduce the formation of foam, usually present at compressor start-up;
- increase its lubricating capacity;
- protect against materials, even under extreme operating conditions.

They are also characterised by low toxicity and high biodegradability.

CO₂ - POEs can be used for both subcritical (e.g. low-temperature cooling stages in supermarket cascade refrigeration systems) and transcritical (e.g. medium-temperature cooling stages in supermarkets) applications.

Physical Quantity Measured (Unit of Measurement)	Analytical Reference Method	CO ₂ - POE 32	CO ₂ - POE 55	CO ₂ - POE 68	CO ₂ - POE 85	CO ₂ - POE 100
ISO VG	-	32	55	68	85	100
Kinematic Viscosity @ 40°C (cSt)	ASTM-D445	32	55	68,3	84	100
Kinematic Viscosity @ 100°C (cSt)	ASTM-D445	7	8,8	9,5	11,5	16
Viscosity Index	ASTM-D2270	150	142	122	119	112
Pour Point (°C)	ASTM-D97	-51	-49	-42	-39	-39
Flash Point (°C)	ASTM-D93	270	280	270	272	272
Density @ 15°C (g/cm ³)	ASTM-D1298	0,983	0,982	0,987	0,991	0,986
Moisture Level (ppm)	ASTM-D6304	50	40	50	40	40
Total Acid (mg KOH/g)	ASTM-D974	<0,04	<0,03	<0,02	<0,03	<0,03

CO₂ - PAG Lubricants

Carbon dioxide (R744) is the natural refrigerant identified as the future ozone-friendly technology. In the last years, the sector has recorded impressive technological development in CO₂-based systems for commercial and industrial applications, especially as far as it concerns CO₂ refrigeration and heat pumps. CO₂ - PAG lubricants are composed of innovative double-end-capped polyalkylene glycols specially designed to operate under high pressure and high-temperature conditions typical of CO₂.

They provide highly efficient lubrication for CO₂ compressors and optimised miscibility with the refrigerant to ensure wear protection even at the highest levels of CO₂ dilution, where alternative lubricants such as PAO or ABZ can reveal hydrodynamic lubrication loss.

Errecom's CO₂ - PAGs are OEM-approved for commercial and industrial refrigeration systems working with CO₂ and are available in different viscosities (between ISO 46-100).

CO₂ - PAGs are characterised by:

- double-end-capped technology with optimised miscibility with CO₂: it maximises the oil return to the compressor to ensure full system efficiency, without loss of hydrodynamic or lubrication properties;
- excellent lubricating properties even under extreme pressure and high-temperature conditions;
- high-performance additives: they ensure excellent thermal, chemical and hydrolytic stability, and reduce downtime and maintenance costs;
- low hygroscopicity: it ensures lower water absorption than alternative R744 technologies (POE, PAO, Alkylbenzenes);
- compatibility with metal and plastic components: it ensures optimised system's stability and durability;
- high viscosity index and low pour point: they guarantee the full efficiency of the system and excellent lubricating properties even under extreme pressure.

Physical Quantity Measured (Unit of Measurement)	Analytical Reference Method	CO ₂ - PAG 46	CO ₂ - PAG 68	CO ₂ - PAG 100
ISO VG	-	46	68	100
Kinematic Viscosity @ 40°C (cSt)	ASTM-D445	49,7	70	107,3
Kinematic Viscosity @ 100°C (cSt)	ASTM-D445	10,7	14	20
Viscosity Index	ASTM-D2270	213	210	216
Pour Point (°C)	ASTM-D97	-49	-46	-43
Flash Point (°C)	ASTM-D93	> 200	> 200	> 200
Density @ 15°C (g/cm ³)	ASTM-D1298	0,998	0,998	0,999
Moisture Level (ppm)	ASTM-D6304	300	300	500
Total Acid (mg KOH/g)	ASTM-D974	0,02	0,02	0,1

CO₂ - POE 32

Art.-Nr.	Qty.	€				Packaging
OL6079.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6079.M.P2	500 mL	-	12	972	1080	
OL6079.K.P2	1 L	-	12	756	756	
OL6079.UP.P2	1 Gal	-	02	196	196	
OL6079.I.P2	4 L	-	02	196	196	
OL6079.P.P2	5 L	-	02	140	140	
OL6079.K.01	1 L	-	12	672	672	Metal Tank
OL6079.P.01	5 L	-	02	152	152	
OL6079.UV	5 Gal	-	01	-	-	
OL6079.V	20 L	-	01	24	24	
OL6079.T	25 L	-	01	24	24	
OL6079.B	200 L	-	01	04	04	
OL6079.IBC	1000 L	-	01	-	-	IBC Cube

CO₂ - POE 68

Art.-Nr.	Qty.	€				Packaging
OL6083.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6083.M.P2	500 mL	-	12	972	1080	
OL6083.K.P2	1 L	-	12	756	756	
OL6083.UP.P2	1 Gal	-	02	196	196	
OL6083.I.P2	4 L	-	02	196	196	
OL6083.P.P2	5 L	-	02	140	140	
OL6083.K.01	1 L	-	12	672	672	Metal Tank
OL6083.P.01	5 L	-	02	152	152	
OL6083.UV	5 Gal	-	01	-	-	
OL6083.V	20 L	-	01	24	24	
OL6083.T	25 L	-	01	24	24	
OL6083.B	200 L	-	01	04	04	
OL6083.IBC	1000 L	-	01	-	-	IBC Cube

CO₂ - PAG 46

Art.-Nr.	Qty.	€				Packaging
OL6036.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6036.M.P2	500 mL	-	12	972	1080	
OL6036.K.P2	1 L	-	12	756	756	
OL6036.UP.P2	1 Gal	-	02	196	196	
OL6036.I.P2	4 L	-	02	196	196	
OL6036.P.P2	5 L	-	02	140	140	
OL6036.K.01	1 L	-	12	672	672	Metal Tank
OL6036.P.01	5 L	-	02	152	152	
OL6036.UV	5 Gal	-	01	-	-	
OL6036.V	20 L	-	01	24	24	
OL6036.T	25 L	-	01	24	24	
OL6036.B	200 L	-	01	04	04	
OL6036.IBC	1000 L	-	01	-	-	IBC Cube

CO₂ - PAG 68

Art.-Nr.	Qty.	€				Packaging
OL6037.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6037.M.P2	500 mL	-	12	972	1080	
OL6037.K.P2	1 L	-	12	756	756	
OL6037.UP.P2	1 Gal	-	02	196	196	
OL6037.I.P2	4 L	-	02	196	196	
OL6037.P.P2	5 L	-	02	140	140	
OL6037.K.01	1 L	-	12	672	672	Metal Tank
OL6037.P.01	5 L	-	02	152	152	
OL6037.UV	5 Gal	-	01	-	-	
OL6037.V	20 L	-	01	24	24	
OL6037.T	25 L	-	01	24	24	
OL6037.B	200 L	-	01	04	04	
OL6037.IBC	1000 L	-	01	-	-	IBC Cube

CO₂ - POE 55

Art.-Nr.	Qty.	€				Packaging
OL6062.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6062.M.P2	500 mL	-	12	972	1080	
OL6062.K.P2	1 L	-	12	756	756	
OL6062.UP.P2	1 Gal	-	02	196	196	
OL6062.I.P2	4 L	-	02	196	196	
OL6062.P.P2	5 L	-	02	140	140	
OL6062.K.01	1 L	-	12	672	672	Metal Tank
OL6062.P.01	5 L	-	02	152	152	
OL6062.UV	5 Gal	-	01	-	-	
OL6062.V	20 L	-	01	24	24	
OL6062.T	25 L	-	01	24	24	
OL6062.B	200 L	-	01	04	04	
OL6062.IBC	1000 L	-	01	-	-	IBC Cube

CO₂ - POE 85

Art.-Nr.	Qty.	€				Packaging
OL6063.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6063.M.P2	500 mL	-	12	972	1080	
OL6063.K.P2	1 L	-	12	756	756	
OL6063.UP.P2	1 Gal	-	02	196	196	
OL6063.I.P2	4 L	-	02	196	196	
OL6063.P.P2	5 L	-	02	140	140	
OL6063.K.01	1 L	-	12	672	672	Metal Tank
OL6063.P.01	5 L	-	02	152	152	
OL6063.UV	5 Gal	-	01	-	-	
OL6063.V	20 L	-	01	24	24	
OL6063.T	25 L	-	01	24	24	
OL6063.B	200 L	-	01	04	04	
OL6063.IBC	1000 L	-	01	-	-	IBC Cube

CO₂ - POE 100

Art.-Nr.	Qty.	€				Packaging
OL6084.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6084.M.P2	500 mL	-	12	972	1080	
OL6084.K.P2	1 L	-	12	756	756	
OL6084.UP.P2	1 Gal	-	02	196	196	
OL6084.I.P2	4 L	-	02	196	196	
OL6084.P.P2	5 L	-	02	140	140	
OL6084.K.01	1 L	-	12	672	672	Metal Tank
OL6084.P.01	5 L	-	02	152	152	
OL6084.UV	5 Gal	-	01	-	-	
OL6084.V	20 L	-	01	24	24	
OL6084.T	25 L	-	01	24	24	
OL6084.B	200 L	-	01	04	04	
OL6084.IBC	1000 L	-	01	-	-	IBC Cube

CO₂ - PAG 100

Art.-Nr.	Qty.	€				Packaging
OL6078.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6078.M.P2	500 mL	-	12	972	1080	
OL6078.K.P2	1 L	-	12	756	756	
OL6078.UP.P2	1 Gal	-	02	196	196	
OL6078.I.P2	4 L	-	02	196	196	
OL6078.P.P2	5 L	-	02	140	140	
OL6078.K.01	1 L	-	12	672	672	Metal Tank
OL6078.P.01	5 L	-	02	152	152	
OL6078.UV	5 Gal	-	01	-	-	
OL6078.V	20 L	-	01	24	24	
OL6078.T	25 L	-	01	24	24	
OL6078.B	200 L	-	01	04	04	
OL6078.IBC	1000 L	-	01	-	-	IBC Cube

HC - PAG Lubricants

HC - PAG lubricants are blends of polyalkylene glycols chosen among the best-performing and most innovative organic molecules on the market. In addition to the double-end-capped technology, they are characterised by excellent additive packages. The additives contained in HC - PAGs, regardless of their viscosity, make it possible to:

- increase lubricity
- improve chemical stability
- reduce hygroscopicity
- increase the anti-wear and anti-corrosion protection
- ensure high solubility and miscibility.

Over time, PAG lubricants, which have originally been developed for automotive applications, have also proved excellent for use with natural refrigerants, such as propane and butane.

HC - PAGs are characterised by:

- insoluble base in water: ensures high lubrication performance in HVAC/R compressors;
- high viscosity index: ensures excellent lubrication, low wear and excellent performance at extreme pressures;
- specific additives for HVAC/R applications: provides excellent thermal conductivity and protection against oxidation and corrosion;

Physical Quantity Measured (Unit of Measurement)	Analytical Reference Method	HC - PAG 68	HC - PAG 100	HC - PAG 150
ISO VG	-	68	100	150
Kinematic Viscosity @ 40°C (cSt)	ASTM-D445	68	100	150
Kinematic Viscosity @ 100°C (cSt)	ASTM-D445	12,4	18,5	25
Viscosity Index	ASTM-D2270	181	202	200
Pour Point (°C)	ASTM-D97	-40	-45	-40
Flash Point (°C)	ASTM-D93	215	228	230
Density @ 15°C (g/cm³)	ASTM-D1298	0,999	0,994	1,005
Moisture Level (ppm)	ASTM-D6304	300	300	300
Total Acid (mg KOH/g)	ASTM-D974	0,05	0,05	0,05

- high flash point for safe use even at high temperatures;
- double-end-capped technology: ensures low hygroscopicity, high chemical and thermal stability and optimised miscibility with refrigerant gases;
- biodegradable and safe for humans and the environment.

HC - PAG 68

Art.-Nr.	Qty.	€				Packaging
OL6069.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6069.M.P2	500 mL	-	12	972	1080	
OL6069.K.P2	1 L	-	12	756	756	
OL6069.UP.P2	1 Gal	-	02	196	196	
OL6069.I.P2	4 L	-	02	196	196	
OL6069.P.P2	5 L	-	02	140	140	
OL6069.K.01	1 L	-	12	672	672	
OL6069.P.01	5 L	-	02	152	152	
OL6069.UV	5 Gal	-	01	-	-	
OL6069.V	20 L	-	01	24	24	
OL6069.T	25 L	-	01	24	24	
OL6069.B	200 L	-	01	04	04	
OL6069.IBC	1000 L	-	01	-	-	IBC Cube

HC - PAG 100

Art.-Nr.	Qty.	€				Packaging
OL6089.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6089.M.P2	500 mL	-	12	972	1080	
OL6089.K.P2	1 L	-	12	756	756	
OL6089.UP.P2	1 Gal	-	02	196	196	
OL6089.I.P2	4 L	-	02	196	196	
OL6089.P.P2	5 L	-	02	140	140	
OL6089.K.01	1 L	-	12	672	672	
OL6089.P.01	5 L	-	02	152	152	
OL6089.UV	5 Gal	-	01	-	-	
OL6089.V	20 L	-	01	24	24	
OL6089.T	25 L	-	01	24	24	
OL6089.B	200 L	-	01	04	04	
OL6089.IBC	1000 L	-	01	-	-	IBC Cube

HC - PAG 150

Art.-Nr.	Qty.	€				Packaging
OL6077.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6077.M.P2	500 mL	-	12	972	1080	
OL6077.K.P2	1 L	-	12	756	756	
OL6077.UP.P2	1 Gal	-	02	196	196	
OL6077.I.P2	4 L	-	02	196	196	
OL6077.P.P2	5 L	-	02	140	140	
OL6077.K.01	1 L	-	12	672	672	
OL6077.P.01	5 L	-	02	152	152	
OL6077.UV	5 Gal	-	01	-	-	
OL6077.V	20 L	-	01	24	24	
OL6077.T	25 L	-	01	24	24	
OL6077.B	200 L	-	01	04	04	
OL6077.IBC	1000 L	-	01	-	-	IBC Cube



NH₃ - PAG Lubricants

To address climate problems associated with ozone depletion and global warming, alternative refrigerant gases have emerged in the HVAC/R sector, including low-GWP HFCs such as R1234yf and halogen-free refrigerant gases, including NH₃ (R717), propane (R290), isobutane (R600a) and carbon dioxide (R744).

Errecom's NH₃ - PAG lubricants, which have been specially formulated to be used with NH₃, are based on the 'capped PAG' technology. This technology is characterized by chemically inactive groups at both ends of the molecule, unlike typical polyalkylene glycols generally consisting of polymer chains with a terminal hydroxyl group (chemically active end).

Therefore, NH₃ - PAG lubricants provide excellent lubrication for compression refrigeration systems and better lubrication properties for ammonia refrigeration systems.

NH₃ - PAG lubricants offer the following pros:

- good miscibility with NH₃ over a wide range of lubricant concentrations and temperatures;
- low hygroscopicity compared to the inclination of uncapped PAG to absorb water;
- high chemical, thermal and hydrolytic stability;
- excellent lubrication power.

Physical Quantity Measured (Unit of Measurement)	Analytical Reference Method	NH ₃ - PAG 46	NH ₃ - PAG 100
ISO VG	-	46	100
Kinematic Viscosity @ 40°C (cSt)	ASTM-D445	49,7	107,3
Kinematic Viscosity @ 100°C (cSt)	ASTM-D445	10,7	20
Viscosity Index	ASTM-D2270	213	216
Pour Point (°C)	ASTM-D97	-45	-45
Flash Point (°C)	ASTM-D93	226	>200
Density @ 15°C (g/cm ³)	ASTM-D1298	0,998	0,999
Moisture Level (ppm)	ASTM-D6304	300	300
Total Acid (mg KOH/g)	ASTM-D974	<0,1	<0,1

NH₃ - PAG 46

Art.-Nr.	Qty.	€				Packaging
OL6092.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6092.M.P2	500 mL	-	12	972	1080	
OL6092.K.P2	1 L	-	12	756	756	
OL6092.UP.P2	1 Gal	-	02	196	196	
OL6092.I.P2	4 L	-	02	196	196	
OL6092.P.P2	5 L	-	02	140	140	
OL6092.K.01	1 L	-	12	672	672	Metal Tank
OL6092.P.01	5 L	-	02	152	152	
OL6092.UV	5 Gal	-	01	-	-	
OL6092.V	20 L	-	01	24	24	
OL6092.T	25 L	-	01	24	24	
OL6092.B	200 L	-	01	04	04	
OL6092.IBC	1000 L	-	01	-	-	IBC Cube

NH₃ - PAG 100

Art.-Nr.	Qty.	€				Packaging
OL6093.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6093.M.P2	500 mL	-	12	972	1080	
OL6093.K.P2	1 L	-	12	756	756	
OL6093.UP.P2	1 Gal	-	02	196	196	
OL6093.I.P2	4 L	-	02	196	196	
OL6093.P.P2	5 L	-	02	140	140	
OL6093.K.01	1 L	-	12	672	672	Metal Tank
OL6093.P.01	5 L	-	02	152	152	
OL6093.UV	5 Gal	-	01	-	-	
OL6093.V	20 L	-	01	24	24	
OL6093.T	25 L	-	01	24	24	
OL6093.B	200 L	-	01	04	04	
OL6093.IBC	1000 L	-	01	-	-	IBC Cube



240 mL Lubricant Cartridges



EasyGun

EasyGun is Errecom's tool for inserting 240 mL cartridges of additives, UV leak detector dyes, and lubricants in AC/R systems.

Art.-Nr.	Description	€	☑	☑	☑
IN1032.01	EasyGun	-	01	-	-
TB5203.01	1/4 SAE Adapter	-	01	2394	2394
TB5204.01	5/16 SAE Adapter	-	01	2394	2394

PAG

Art.-Nr.	Description	€	☑	☑	☑
OL6069.DQ.01	HC - PAG 68	-	06	2394	2394
OL6089.DQ.01	HC - PAG 100	-	06	2394	2394
OL6077.DQ.01	HC - PAG 150	-	06	2394	2394
OL6036.DQ.01	CO ₂ - PAG 46	-	06	2394	2394
OL6037.DQ.01	CO ₂ - PAG 68	-	06	2394	2394
OL6078.DQ.01	CO ₂ - PAG 100	-	06	2394	2394

POE

Art.-Nr.	Description	€	☑	☑	☑
OL6011.DQ.01	POE 22	-	06	2394	2394
OL6012.DQ.01	POE 32	-	06	2394	2394
OL6015.DQ.01	POE 46	-	06	2394	2394
OL6055.DQ.01	POE 55	-	06	2394	2394
OL6016.DQ.01	POE 68	-	06	2394	2394
OL6017.DQ.01	POE 100	-	06	2394	2394
OL6020.DQ.01	POE 170	-	06	2394	2394
OL6021.DQ.01	POE 220	-	06	2394	2394
OL6062.DQ.01	CO ₂ - POE 55	-	06	2394	2394
OL6063.DQ.01	CO ₂ - POE 85	-	06	2394	2394

MINERAL OIL

Art.-Nr.	Description	€	☑	☑	☑
OL6064.DQ.01	MINERAL 32/3	-	06	2394	2394
OL6065.DQ.01	MINERAL 46	-	06	2394	2394
OL6066.DQ.01	MINERAL 55/4	-	06	2394	2394
OL6067.DQ.01	MINERAL 68	-	06	2394	2394
OL6068.DQ.01	MINERAL 100/5	-	06	2394	2394

Mineral Oil

Physical Quantity Measured (Unit of Measurement)	Analytical Reference Method	MINERAL 32/3	MINERAL 46	MINERAL 55/4	MINERAL 68	MINERAL 100/5
ISO VG	-	32	46	55	68	100
Kinematic Viscosity @ 40°C (cSt)	ASTM-D445	32	46	55	68	99
Kinematic Viscosity @ 100°C (cSt)	ASTM-D445	4,6	5,4	6,2	6,6	8,8
Viscosity Index	ASTM-D2270	95	94	96	95	94
Pour Point (°C)	ASTM-D97	-45	-36	-32	-30	-30
Flash Point (°C)	ASTM-D93	190	194	198	200	220
Density @ 15°C (g/cm³)	ASTM-D1298	0,904	0,91	0,91	0,915	0,905
Moisture Level (ppm)	ASTM-D6304	16	16	18	17	10
Total Acid (mg KOH/g)	ASTM-D974	0,02	0,02	0,02	0,02	0,02
Colour (APHA)	ASTM-D1500	0,5	< 1,0	-	1,0	< 1,0

ERRECOM's mineral oils are highly refined hydrotreated naphthenic bases enhanced by additives that ensure:

- high ageing stability,
- low pour point,
- excellent low-temperature behaviour,
- good compatibility with ammonia (NH₃), HCFCs (e.g. R22), hydrocarbons (e.g. propane R290, propylene R1270).

The high solvent power and excellent low-temperature properties lead to good floc points for the refrigerant-oil mixture.

As it is wax-free, ERRECOM's mineral oil has a low pour point and good cold pour properties.

At high temperatures, ERRECOM's mineral oil has a higher flash point than other products on the market and high thermal and chemical stability. It does not corrode iron, copper, and aluminium.

MINERAL 32/3

Art.-Nr.	Qty.	€				Packaging
OL6064.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6064.M.P2	500 mL	-	12	972	1080	
OL6064.K.P2	1 L	-	12	756	756	
OL6064.UP.P2	1 Gal	-	02	196	196	
OL6064.I.P2	4 L	-	02	196	196	
OL6064.P.P2	5 L	-	02	140	140	Metal Tank
OL6064.K.01	1 L	-	12	672	672	
OL6064.P.01	5 L	-	02	152	152	
OL6064.UV	5 Gal	-	01	-	-	
OL6064.V	20 L	-	01	24	24	
OL6064.T	25 L	-	01	24	24	IBC Cube
OL6064.B	200 L	-	01	04	04	
OL6064.IBC	1000 L	-	01	-	-	

MINERAL 55/4

Art.-Nr.	Qty.	€				Packaging
OL6066.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6066.M.P2	500 mL	-	12	972	1080	
OL6066.K.P2	1 L	-	12	756	756	
OL6066.UP.P2	1 Gal	-	02	196	196	
OL6066.I.P2	4 L	-	02	196	196	
OL6066.P.P2	5 L	-	02	140	140	Metal Tank
OL6066.K.01	1 L	-	12	672	672	
OL6066.P.01	5 L	-	02	152	152	
OL6066.UV	5 Gal	-	01	-	-	
OL6066.V	20 L	-	01	24	24	
OL6066.T	25 L	-	01	24	24	IBC Cube
OL6066.B	200 L	-	01	04	04	
OL6066.IBC	1000 L	-	01	-	-	

MINERAL 46

Art.-Nr.	Qty.	€				Packaging
OL6065.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6065.M.P2	500 mL	-	12	972	1080	
OL6065.K.P2	1 L	-	12	756	756	
OL6065.UP.P2	1 Gal	-	02	196	196	
OL6065.I.P2	4 L	-	02	196	196	
OL6065.P.P2	5 L	-	02	140	140	Metal Tank
OL6065.K.01	1 L	-	12	672	672	
OL6065.P.01	5 L	-	02	152	152	
OL6065.UV	5 Gal	-	01	-	-	
OL6065.V	20 L	-	01	24	24	
OL6065.T	25 L	-	01	24	24	IBC Cube
OL6065.B	200 L	-	01	04	04	
OL6065.IBC	1000 L	-	01	-	-	

MINERAL 68

Art.-Nr.	Qty.	€				Packaging
OL6067.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6067.M.P2	500 mL	-	12	972	1080	
OL6067.K.P2	1 L	-	12	756	756	
OL6067.UP.P2	1 Gal	-	02	196	196	
OL6067.I.P2	4 L	-	02	196	196	
OL6067.P.P2	5 L	-	02	140	140	Metal Tank
OL6067.K.01	1 L	-	12	672	672	
OL6067.P.01	5 L	-	02	152	152	
OL6067.UV	5 Gal	-	01	-	-	
OL6067.V	20 L	-	01	24	24	
OL6067.T	25 L	-	01	24	24	IBC Cube
OL6067.B	200 L	-	01	04	04	
OL6067.IBC	1000 L	-	01	-	-	

MINERAL 100/5

Art.-Nr.	Qty.	€				Packaging
OL6068.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6068.M.P2	500 mL	-	12	972	1080	
OL6068.K.P2	1 L	-	12	756	756	
OL6068.UP.P2	1 Gal	-	02	196	196	
OL6068.I.P2	4 L	-	02	196	196	
OL6068.P.P2	5 L	-	02	140	140	Metal Tank
OL6068.K.01	1 L	-	12	672	672	
OL6068.P.01	5 L	-	02	152	152	
OL6068.UV	5 Gal	-	01	-	-	
OL6068.V	20 L	-	01	24	24	
OL6068.T	25 L	-	01	24	24	IBC Cube
OL6068.B	200 L	-	01	04	04	
OL6068.IBC	1000 L	-	01	-	-	

Vacuum Pump Oil

ERRECOM's Vacuum Pump Oils are blends of carefully selected mineral oils with low vapour pressure and a tight distillation range to ensure the best performance in terms of lubrication of vacuum pumps, including rotary vane pumps.

The main features of Errecom's mineral oils are:

- high thermal stability: it can be used in closed systems operating even at high temperatures and high pressures avoiding the growth of deposits and sludge;
- high oxidation stability: it extends the charge in operation, thus preventing the viscosity of the product from increasing too early;
- high hydrolytic stability: it protects the oil from decomposition, even in the presence of small percentages of water;
- good demulsibility: it quickly separates oil from the water that may have entered the system, further inhibiting the oxidation process;
- higher filterability even in the presence of water (compared to previous lubricants): it avoids clogging of the filters and extends filter replacement intervals;
- anti-corrosion and anti-rust power: it protects all metal components of the system;
- anti-foam properties: avoids the formation/presence of foam and therefore of air that would reduce the system's efficiency due to the compressibility different from that of oil.

Physical Quantity Measured (Unit of Measurement)	Analytical Reference Method	ISO 32	ISO 46	ISO 68	HIGH VISCOSITY ISO 46 HD
ISO VG	-	32	46	68	46
Kinematic Viscosity @ 40°C (cSt)	ASTM-D445	32,2	46,4	67,9	46,8
Kinematic Viscosity @ 100°C (cSt)	ASTM-D445	5,5	7,2	8,8	7,6
Viscosity Index	ASTM-D2270	105	103	102	133
Pour Point (°C)	ASTM-D97	-31	-26	-25	-16
Flash Point (°C)	ASTM-D93	210	215	220	225
Density @ 15°C (g/cm³)	ASTM-D1298	0,870	0,872	0,877	0,845

ISO 32

Art.-Nr.	Qty.	€				Packaging
OL6053.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6053.M.P2	500 mL	-	12	972	1080	
OL6053.K.P2	1 L	-	12	756	756	
OL6053.UP.P2	1 Gal	-	02	196	196	
OL6053.I.P2	4 L	-	02	196	196	
OL6053.P.P2	5 L	-	02	140	140	
OL6053.UV	5 Gal	-	01	-	-	Metal Tank
OL6053.V	20 L	-	01	24	24	
OL6053.T	25 L	-	01	24	24	
OL6053.B	200 L	-	01	04	04	
OL6053.IBC	1000 L	-	01	-	-	IBC Cube

ISO 46

Art.-Nr.	Qty.	€				Packaging
OL6054.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL6054.M.P2	500 mL	-	12	972	1080	
OL6054.K.P2	1 L	-	12	756	756	
OL6054.UP.P2	1 Gal	-	02	196	196	
OL6054.I.P2	4 L	-	02	196	196	
OL6054.P.P2	5 L	-	02	140	140	
OL6054.UV	5 Gal	-	01	-	-	Metal Tank
OL6054.V	20 L	-	01	24	24	
OL6054.T	25 L	-	01	24	24	
OL6054.B	200 L	-	01	04	04	
OL6054.IBC	1000 L	-	01	-	-	IBC Cube

ISO 68

Art.-Nr.	Qty.	€				Packaging
OL1008.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL1008.M.P2	500 mL	-	12	972	1080	
OL1008.K.P2	1 L	-	12	756	756	
OL1008.UP.P2	1 Gal	-	02	196	196	
OL1008.I.P2	4 L	-	02	196	196	
OL1008.P.P2	5 L	-	02	140	140	
OL1008.UV	5 Gal	-	01	-	-	Metal Tank
OL1008.V	20 L	-	01	24	24	
OL1008.T	25 L	-	01	24	24	
OL1008.B	200 L	-	01	04	04	
OL1008.IBC	1000 L	-	01	-	-	IBC Cube

ISO 46 HD HIGH VISCOSITY INDEX

Art.-Nr.	Qty.	€				Packaging
OL1010.Q.P2	250 mL	-	24	2592	2592	Plastic Tank
OL1010.M.P2	500 mL	-	12	972	1080	
OL1010.K.P2	1 L	-	12	756	756	
OL1010.UP.P2	1 Gal	-	02	196	196	
OL1010.I.P2	4 L	-	02	196	196	
OL1010.P.P2	5 L	-	02	140	140	
OL1010.UV	5 Gal	-	01	-	-	Metal Tank
OL1010.V	20 L	-	01	24	24	
OL1010.T	25 L	-	01	24	24	
OL1010.B	200 L	-	01	04	04	
OL1010.IBC	1000 L	-	01	-	-	IBC Cube

Oil Charging Pumps

Oil charging pumps facilitate the oil loading into the compressor of refrigeration systems by transferring it directly from the container, thus eliminating the risk of contamination with air and humidity.


- Fits the size of each container.
- Capacity per shot: 50 mL.
- 1/4" SAE Male thread.
- Maximum output pressure: 10 bar (145 psi).
- Length of closed pump: 41 cm.
- Hose length supplied: 150 cm 1/4 SAE x 1/4 SAE.

Art.-Nr.	€	
PM1012.01	-	01



- Can be used with 10-20-25 L containers.
- Compatible with all types of refrigerant gases.
- Capacity per shot: 75 mL.
- 3/8" or 1/4" SAE Male thread (reduction included).
- Maximum output pressure: 17 bar (250 psi).
- Hose length: 150 cm 1/4 SAE x 1/4 SAE.

Art.-Nr.	€	
PM1013.01	-	01

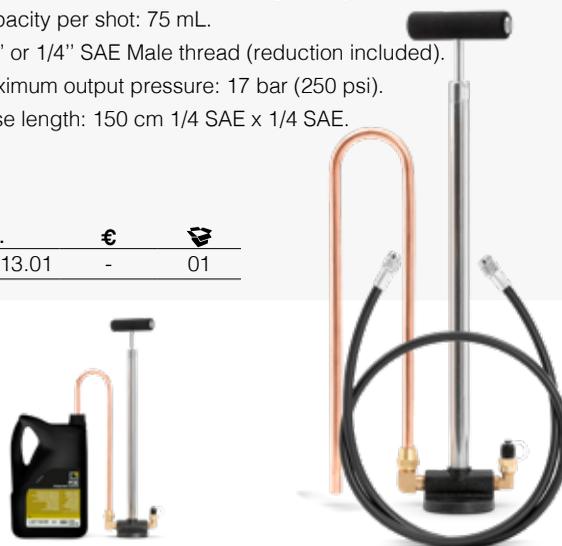

POE ↔ PAG Id

Test to Verify the Type of Refrigeration Lubricant circulating inside an AC/R System (POE or PAG)

- Recommended when performing maintenance on AC/R systems whose refrigeration lubricant is unknown.
- Works with all POE and PAG lubricants.
- Easy to use.
- Quick and accurate results in a few seconds:
 - clear-looking mixture indicates PAG;
 - murky-looking mixture indicates POE.
- Contains 4 tests.

Art.-Nr.	€			
RK1411.S1	-	12	2160	2160



Oil Test

Test for checking the Type of Refrigeration Lubricant inside an AC/R System

- Recommended when performing maintenance on AC/R systems whose refrigeration lubricant is unknown.
- Works with all POE, ABZ and mineral oils.
- Saves time and money by avoiding laboratory tests or the use of a refractometer.
- Avoids making the common and expensive mistake of mixing POE lubricant with mineral oils.
- Provides reliable results in just a few seconds.
- Compatible with all types of refrigerant gases.
- Contains 2 tests.

Art.-Nr.	€			
RK1055.S1	-	12	2160	2160





Flushing Test

Test to Verify the Proper Cleaning of Condensers, Evaporators and Refrigerant Lines

- Certifies the proper cleaning of condensers, evaporators, and refrigerant lines.
- Detects contaminants (moisture, acidity, rust, dust, metal ions and oxides) in AC/R system components and pipes.
- Clear and instant result: if the colour changes, the system is not clean; if the colour does not change, you can start the system.

NEWS 2023

Art.-Nr.	Description	€			
TR1233.N.M0	400 mL can with rubber cone	-	12	1008	1176

**PATENT
PENDING**



If the colour changes, flush the system.



If the colour doesn't change, start the system.



Belnet

Quick Evaporating Flushing Fluid

- Evaporates quickly and completely and does not leave residues.
- Removes old oil, debris, and contaminants.
- Safe for all air conditioning and refrigeration systems.
- Requires manual or pneumatic systems for insertion.
- Flammable.

Art.-Nr.	Description	€			
TR1009.01	1 L metal bottle	-	12	672	768
TR1055.01	5 L metal tank	-	02	168	196

Belnet Aerosol

- Ideal for cleaning small refrigeration lines.
- Ready to use.
- High flushing pressure (8 bar/116 psi).
- Constant pressure until the cylinder is completely empty.
- Does not require additional equipment for insertion.

Art.-Nr.	Description	€			
TR1009.U.M0	600 mL can with rubber cone	-	12	1008	1176
TR1009.U.M1	600 mL can with thread	-	12	1008	1176
TR1009.YW.M0	750 mL can with rubber cone	-	12	840	840
TR1009.YW.M1	750 mL can with thread	-	12	840	840



Art.-Nr.	Description	€	
RP1042.01	1/4 SAE adapter (A)	-	01
RP1046.01	Flush Gun (B)	-	01
RP1048.01	Flush Gun with hose and ball valve (C)	-	01

Safenet

Quick Evaporating and Non-flammable Flushing Fluid

- Evaporates quickly and completely and does not leave residues.
- Non-flammable.
- Removes old oil, debris, and contaminants.
- Safe for all air conditioning and refrigeration systems.
- Requires manual or pneumatic systems for insertion.

Art.-Nr.	Description	€			
TR1187.K.01	1 L metal bottle	-	12	672	768
TR1187.P.01	5 L metal tank	-	02	168	196
TR1187.V	25 L metal tank	-	01	24	24

Safenet FLUSH

- Ideal for cleaning small refrigeration lines.
- Ready to use.
- High flushing pressure (8 bar/116 psi).
- Constant pressure until the cylinder is completely empty.
- Does not require additional equipment for insertion.

Art.-Nr.	Description	€			
TR1187.U.M0	600 mL can with rubber cone	-	12	1008	1176
TR1187.U.M1	600 mL can with thread	-	12	1008	1176
TR1187.YW.M0	750 mL can with rubber cone	-	12	840	840
TR1187.YW.M1	750 mL can with thread	-	12	840	840



Top Flush

Flushing Fluid Alternative to Decafluoropentane

- Green and non-flammable formulation (hydrocarbon-based): zero ODP (ozone-depleting potential) and low GWP (global warming potential).
- Evaporates quickly and completely and does not leave residues.
- Low boiling point and high volatility.
- Removes particles and dust.
- High degreasing power.
- Removes even residual water trapped in the thinnest cracks.
- Effective even after numerous boiling cycles.
- Low surface tension.
- Excellent chemical and thermal stability, and low viscosity.
- Safe for all air conditioning and refrigeration systems.
- Requires manual or pneumatic systems for insertion.

Art.-Nr.	Description	€			
TR1184.K.01	1 L metal bottle	-	12	672	768
TR1184.P.01	5 L metal tank	-	02	168	196
TR1184.T	25 L metal tank	-	01	24	24



Alpha Flush

Fluid for Automatic Flushing Units

- Removes old oil, debris, and contaminants.
- Any residues are compatible with all refrigerant gases.
- Non-flammable.
- No ADR.
- Safe for all automatic flushing units.

Art.-Nr.	Description	€			
TR1142.K.01	1 L metal bottle	-	12	672	768
TR1142.P.01	5 L metal tank	-	02	168	196



Easy Flush

Flushing Unit for AC/R Systems with Electric Pump

EASY FLUSH is a flushing unit for AC/R systems with a manually controlled electric pump. It allows flushing the circuit clockwise and anticlockwise.

Technical features:

- Power supply: 230/240 V - 50/60 Hz.
- 20 L internal tank.
- Pump capacity: 14 L/min.
- Pump power: 0,75 Kw.
- Max pump pressure: 0,45 MPa.
- Mechanical seal pump with EPDM gaskets.
- Mechanical suction filter.
- Connection for external nitrogen cylinder.
- External taps to reverse the flushing cycle without disconnecting the hoses.
- 3 m flexible hoses with 1/4 SAE ball valves.
- Adapter kit for connecting to AC/R systems.
- Interchangeable fittings: 1/4 SAE - 3/8 SAE - 1/2 SAE (2 pieces each).
- Weight: 20Kg. Built-in cart.

CAUTION!

Use this flushing unit exclusively with Alpha Flush (p.32).

Art.-Nr.	€	
VP1027.01	-	01



Flush Pump

Electric Pump to Flush A/C Systems

FLUSH PUMP is a cost-effective flushing system for large air-conditioning systems.

Technical Features:

- Power supply: 230/240 V – 50/60 Hz.
- Pump capacity: 14 L/min. Maximum pump power: 0.75 kW.
- Maximum pump pressure: 0.45 MPa.
- Mechanical seal pump with EPDM gaskets.
- 2.5 m flexible hoses with female 1/4 SAE connections.
- Interchangeable connections: 1/4 SAE -3/8 SAE- 1/2 SAE (2 pcs each).
- Storage and travel case.

Art.-Nr.	€	🗑️
VP1028.01	-	01



Fast Flush Kit

Universal Cleaning and Flushing Kit

The kit includes:

- Belnet Aerosol can with thread.
- Flush Gun with hose and ball valve.
- Disposable nitrogen cylinder 950cc. Mini pressure reducer 0÷10 bar.
- Adapter for 1/4 SAE swivel hose.
- Quick coupler BP R134a. 1/4 SAE M x 5/16 SAE F 90° adapter.
- Transport plastic case.

Art.-Nr.	€	🗑️
RK1078	-	01




Flushing Gun

Affordable equipment for flushing AC/R systems.

- Volume: 0,75 L.
- Ball valve with 1/4" female fitting.
- Hose length: 60 cm.
- 0÷12 bar gauge.
- 10 bar safety valve.

Art.-Nr.	Description	€	🗑️
RP1027.01	Flushing gun	-	01
MN1127.01	Spare gauge	-	01
RP1069.01	Spare flushing gun	-	01
RP1072.01	Spare ball valve	-	01

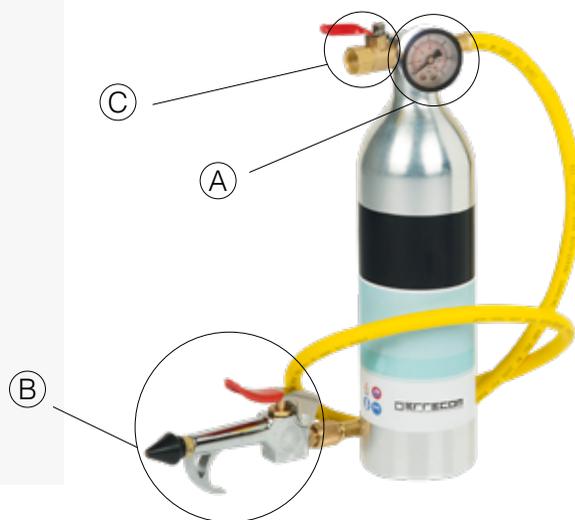

Flushing Kit

The kit includes:

- Tank with flushing gun.
- Adapter kit for connecting to AC/R systems.
- 10-litre tank for recovery of contaminated liquid.
- Storage and transport plastic case.

Art.-Nr.	€	
RK1088.01	-	01



Flushing Adapter Kit

These are universal adapters with 1/4 SAE male fitting that allow connection to any components of an AC/R system so that the flushing process can be carried out safely

Art.-Nr.	Description	€	
RK1332	Adapter kit	-	01
RP1051.01	Spare cone	-	01



Easy Pass

Adapter Connection Kit for HVAC/R Equipment

EASY PASS is a kit for the quick connection of two refrigeration hoses to enable complete flushing.

Art.-Nr.	€	
RK1343	-	01



Flushing Hook

Flushing Gun Hook

Tool to connect the flushing equipment to the A/C system. Its small size facilitates the connection to A/C systems even in narrow spaces.

Technical features:

- male connection 1/4" SAE.
- size: 80 x 50 mm.

Art.-Nr.	€	
RP1081.01	-	01






Cleaning and Maintenance
of Indoor Units

Ceily

Ceiling Mounted Air Conditioner Cleaning Cover

- Ensures deep protection of the area around the evaporator and floors.
- Strong metal frame: easy to assemble.
- Suitable for ceiling mounted units of any size.

Art.-Nr.	Description	€		
PM1010.01	Ceily	-	01	-
PM1011.01	Spare recovery bag	-	01	-

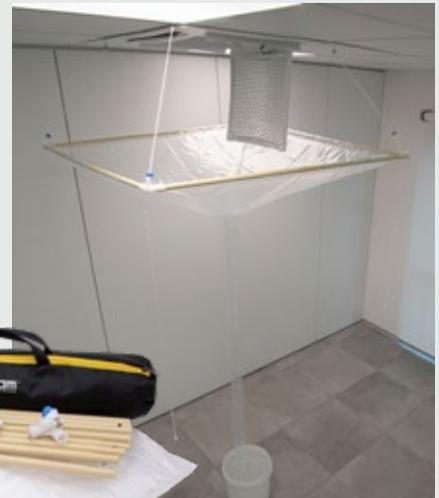

Wally

Air Conditioner Cleaning Cover


- Ensures complete protection of the area around the evaporator.
- Grants perfect fit for any indoor units thanks to the adjustable elastic drawstring.
- Reusable.

Art.-Nr.	Description	Pack	€		
PM1006.01	Wally - 15 pcs	20 L bucket	-	15	-
PM1006.S1	Wally - 15 pcs	Cardboard box	-	15	-



A/C Cleaning Brushes

Art.-Nr.	Description	€		
RL1034.01	Ⓐ Brush	-	01	-
RL1035.01	Ⓑ Soft bristle duster	-	01	-

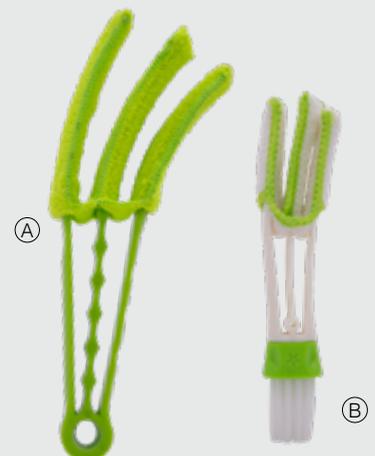

Condensate Drain Maintenance



Errecom's condensate drain cleaners have been formulated by our in-house chemical laboratory to **remove and prevent** the development of **algae, mucilage, silt, and mould**. Available in liquid, gel or tablet form, regular use is recommended to **prevent air conditioner's condensate drain from clogging**.

Drizzle Condensate Drain Cleaner

- Removes and prevents the development of algae, mucilage, silt, and mould.
- Prevents air conditioner's condensate drain from clogging.
- Ready to use.
- New design: swan neck spout to simplify the application process.

Drizzle: liquid formulation. Lavender scented.

Drizzle Gel: gel formulation to perfectly adhere to the air conditioner drain line. Aloe scented.

Drizzle Enzi: the enzymatic formulation in gel ensures a long-lasting cleaning and unblocking action. Eco-friendly formulation to ensure deeper cleaning with less chemical. Aloe scented.

Art.-Nr.	Description	Quantity	€	☑	☑	☑
AB1078.M.S1	Drizzle	500 mL	- 15	-	-	-
AB1078.K.01	Drizzle bottle without swan neck spout	1 L	- 06	-	-	-
AB1249.M.S1	Drizzle Gel	500 mL	- 15	-	-	-
AB1250.M.S1	Drizzle Enzi	500 mL	- 15	-	-	-

READY TO USE
RTU



Emerald Tabs Cleaning Biodegradable Tabs for Condensate Drain

- Highly biodegradable formulation (over 99%).
- Also available in MINI format.
- 1 tab every 25/30 days. Registered disinfectant in Germany (N-108924) – MINI (N-108925).

Art.-Nr.	Description	€	☑	☑	☑
AB1099.01.JA	18x8-gram tabs	- 12	-	-	-
AB1098.01	100x2.5-gram mini tabs	- 06	-	-	-

READY TO USE
RTU



Drain Tabs Cleaning Tabs for Condensate Drain

- 1/2 tabs every 15/20 days for units up to 12,000 Btu/H (3 kW).
- Registered disinfectant in Germany (N-108935).

Art.-Nr.	Description	€	☑	☑	☑
AB1097.01.JA	18 tabs	- 12	-	-	-

READY TO USE
RTU



□ NSF Certification

NSF (National Science Foundation) is the most accredited independent third-party certification body which, since 1944, tests and certifies products to meet precise international public health and safety standards.

NSF certification:

- ensures that products have been tested and found to meet the required health and safety standards;
- confirms that labelling and claims are truthful and compliant with regulations;
- demonstrates the company's commitment to quality, safety, and compliance with regulations.

Most importantly, NSF certification is not a one-time event but involves regular on-site inspections of manufacturing facilities and random re-testing of products. NSF certification, therefore, guarantees that not only the products but also the company's entire production process meets high standards of safety and reliability.



□ Indoor Unit Cleaners



Errecom's **evaporator cleaners** are alkaline cleaners developed to **remove** the most stubborn deposits of **organic residues, grease, oil, dust, pollen, and smog** from indoor units. They quickly and effectively degrease the treated surfaces and are particularly indicated for removing dirt settled on coils. They can be diluted with water according to the dilution ratio specified on the product: the higher this ratio, the higher the concentration of active substances contained in the cleaner.

Chinook A/C Filter Cleaner

- Easily removes dust, germs, mould, contaminants, and harmful agents.
- Eliminates the causes of bad odours, leaving a pleasant and long-lasting scent.
- Quick and effective application.
- Ready to use.
- HACCP compliant.

Art.-Nr.	Description	€			
AB1077.K.S1	1 L spray bottle	-	06	576	576



1 L



Evap Coil + NSF Certified Evaporator Cleaner

- NSF certified (K4).
- Purifies A/C ducts, incorporating and removing contaminants such as dust, dirt, allergens, and microorganisms that often cause bad odours.
- Quickly and successfully restores the indoor air quality.
- Easy to use thanks to the long cannula.
- Ready to use.
- Does not require rinsing. Also available in the foaming version EVAP COIL F+, whose formula incorporates and removes even the hardest to reach dirt.
- HACCP compliant.

Art.-Nr.	Description	€	🗑️	♻️	♻️
AB1247.N.01	Evap Coil +	-	12	1008	1176
AB1248.N.01	Evap Coil F+	-	12	1008	1176



400 ml



Evaporator Cleaner Cleaner for Evaporators

- Purifies A/C ducts, incorporating and removing contaminants such as dust, dirt, allergens, and microorganisms that often cause bad odours.
- Restores the indoor air quality releasing a pleasant scent.
- Easy to use thanks to the cannula.
- Quick and effective action. Ready to use. Does not require rinsing.
- Also available in the foaming version EVAPORATOR CLEANER FOAM, whose formula incorporates and removes even the hardest to reach dirt.
- HACCP compliant. Registered disinfectant in Germany (N-108926) EVAPORATOR CLEANER FOAM (N-108927).

Art.-Nr.	Evaporator Cleaner	€	🗑️	♻️	♻️
AB1084.J.01	200 mL	-	24	2880	3168
AB1084.N.01	400 mL	-	12	1008	1176



Art.-Nr.	Evaporator Cleaner Foam	€	🗑️	♻️	♻️
AB1049.F.01	100 mL	-	30	3600	4050
AB1049.J.01	200 mL	-	24	2880	3168
AB1049.N.01	400 mL	-	12	1008	1176



Power Clean - IN High-pressure Evaporator Cleaner

- Its special aerosol can is designed to achieve a constant and high-pressure delivery.
- Easily removes even the most stubborn dirt that accumulates on evaporator coils such as dust, grease, etc.
- Dries quickly.
- Does not require rinsing.
- HACCP compliant.

Art.-Nr.	€	🗑️	♻️	♻️
AB1063.U.01	-	12	1008	1176



600 mL



CleanSi

80% Alcohol-based Surface Cleaner

- 80% alcohol-based formulation: removes microorganisms such as bacteria, germs, allergens, dirt, grease, marks, etc.
- Perfect to clean A/C filter and ducts and high-touch surfaces such as handles, handrails, buttons, vending machines, desks, etc.
- Ready to use.
- Does not require rinsing.
- Evaporates quickly and completely without leaving residues or marks.
- HACCP compliant.

Art.-Nr.	Description	€			
AB1228.N.01	400 mL aerosol can	-	12	1248	1404



CleanSi Foam

Foamy Cleaner for Surfaces

- Removes dirt and contaminants ensuring long-lasting efficacy.
- Ideal to purify high-touch surfaces.
- Compatible with matte surfaces, plastic, rubber, faux leather, wood and textiles.
- Silicone free; does not leave stains.

NOTE: We recommend testing for material compatibility before using.

Art.-Nr.	Description	€			
AB1256.M.01	500 mL aerosol can	-	12	-	-



NEWS 2023

Starlux

Foamy Cleaner for Air Conditioner Surfaces

- Removes dust, stubborn dirt, grease, and stains.
- Foam formulation to better adhere on both wall-mounted and ceiling cassette air conditioners.
- Can be used on plastic and metal casings.
- Perfect to clean all plastic surfaces.

Art.-Nr.	€			
AB1226.N.01	-	12	1248	1404



No-Age Plus

Anticorrosive Protective Spray Treatment for A/C Systems

- Sprayed directly on evaporator and condenser coils, it creates a protective film that defends surfaces from contaminants such as salt and smog, preventing metal corrosion.
- Resists moisture, smog, salt, sand, and dust.
- Ideal to use on evaporators and condensers installed in highly oxidising areas (seaside locations, heavily polluted areas) and subject to salt, acid rain, and smog attack.
- Extends the life of indoor and outdoor units.
- Aerosol format to ensure uniform application.



Art.-Nr.	€			
AB1103.YW.01	-	12	840	840

750 mL

Evo Tabs

Cleaning Tabs for Evaporators

- 1 tab (20 g) to obtain 5 L of ready-to-use alkaline cleaner.
- Can be used with any water, even the hardest one.
- Removes water limescale and leaves no residue.
- Recommended for recurring cleaning.
- Releases a pleasant scent.
- Can be dispensed with any tools, including spray pumps.



Art.-Nr.	€			
AB1089.01.JA	-	12	-	-

1x5L
DILUTION



Evo Ultra

Neutral Cleaner for Evaporators

- Active substance for deep and effective cleaning of evaporators.
- 1:20 dilution.
- Can be diluted with any type of water, even the hardest one.
- Leaves no marks or residues on treated surfaces.
- Eco-friendly glass packaging. Neutral Cleaner: removes both grease and salt residues.

Art.-Nr.	€			
AB1225.Q.S1	-	24	-	-

1:20
MAX DILUTION



250 mL

Luxedo

Revitalizing Cleaner for Evaporators

- Purifying and revitalizing action.
- Scented.
- Ready to use.
- Registered disinfectant in Germany (N-108929).

Art.-Nr.	Description	€			
AB1073.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1073.K.C1	1 L bottle	-	06	576	576
AB1073.P.01	5 L tank	-	02	144	144
AB1073.D.01	10 L tank	-	01	-	-



READY TO USE
RTU

Sword

Concentrated Revitalizing Cleaner for Evaporators

- Purifying and revitalizing action.
- Scented.

Art.-Nr.	Description	€			
AB1074.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1074.K.C1	1 L bottle	-	06	576	576
AB1074.P.01	5 L tank	-	02	144	144
AB1074.D.01	10 L tank	-	01	-	-



1:3
MAX DILUTION

Clench

Descaling Cleaner with Anticorrosive Action for Evaporators

- Powerful descaling action: acts like an acid-based cleaner, removing the most stubborn salt deposits despite its alkaline formulation.
- Ideal for restoring unkept indoor units.
- Recommended for applications in very aggressive environments.

Art.-Nr.	Description	€			
AB1069.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1069.K.C1	1 L bottle	-	06	576	576
AB1069.P.01	5 L tank	-	02	144	144
AB1069.D.01	10 L tank	-	01	-	-



1:5
MAX DILUTION

Eco Jab

Biodegradable Evaporator Cleaner

- Highly biodegradable formula whose values are even higher than those required by current European legislation.
- Contains only natural surfactants.
- Does not contain acids, phosphates, solvents, or soda.
- Unscented formulation: particularly suitable to be used in environments with food.

Art.-Nr.	Description	€			
AB1071.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1071.K.C1	1 L bottle	-	06	576	576
AB1071.P.01	5 L tank	-	02	144	144
AB1071.D.01	10 L tank	-	01	-	-



1:6
MAX DILUTION

Jab

Highly Effective Cleaner for Evaporators

- OEM approved.
- Extremely effective and versatile, ideal for recurring cleaning of indoor units.
- Removes even the most stubborn dirt from metal and plastic surfaces.
- Scented.
- Registered disinfectant in Germany (N-108916).

Art.-Nr.	Description	€			
AB1068.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1068.K.C1	1 L bottle	-	06	576	576
AB1068.P.01	5 L tank	-	02	144	144
AB1068.D.01	10 L tank	-	01	-	-



PH7 Cleaner

Neutral Evaporator Cleaner

- Neutral formulation: effective against both grease and salt deposits.
- Powerful yet gentle formula.
- Neutralises and removes unpleasant odours, leaving a long-lasting scent.
- Ready to use.

Art.-Nr.	Description	€			
AB1219.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1219.K.C1	1 L bottle	-	06	576	576
AB1219.P.01	5 L tank	-	02	144	144
AB1219.D.01	10 L tank	-	01	-	-



Universal Nano Cleaner

All-purpose Cleaner for Air Conditioning Systems

- All-purpose cleaner: ideal to clean both evaporators and condensers.

Dilution:

- 1:6 for evaporators;
- RTU for condensers.

Art.-Nr.	Description	€			
AB1105.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1105.K.C1	1 L bottle	-	06	576	576
AB1105.P.01	5 L tank	-	02	144	144
AB1105.D.01	10 L tank	-	01	-	-



SGP Coil Cleaner

NSF Certified Universal Alkaline Cleaner

- NSF certified (K5).
- Eco-friendly cleaner: non-foaming formula to ensure faster rinsing.
- Biodegradable.
- Anticorrosive action.
- Scented.



Dilution:

- 1:6 for condensers - 1:10 for evaporators - 1:15 for A/C filters

Art.-Nr.	Description	€			
AB1244.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1244.K.C1	1 L bottle	-	06	576	576
AB1244.P.01	5 L tank	-	02	144	144



Foggy Kit

Purifying Interior Treatment with Dry Smoke - 48 Applications



- Includes Kemuri, the smoke machine, and 48 bottles of KIRI, the purifying active substance, which is EN1276, EN14476, EN1650, EN16777, and EN13697 certified.
- Takes only a few minutes to complete the whole purifying treatment.
- Purifies even the most difficult-to-reach surfaces.
- Purifies both surfaces and A/C ducts, restoring the indoor air quality.
- Safe for all surfaces, fabrics, and electronic equipment.
- Does not add additional moisture to the environment.
- Long-lasting purifying protection.



Art.-Nr.	€	
RK1455	-	01

Kemuri

The Purifying Smoke Machine

- 3 cycles to complete the purifying treatment.
- Cable control. Power supply: 230 V.
- Boiler: 400W. Emission: 10 m³/minute (350 ft³/ minute).
- Preheating: about 3-5 minutes.
- Liquid consumption: 30 min/200 mL (30 min/6.7 fl oz).
- Liquid tank capacity: 200 mL (6.7 fl oz).
- Size (LxHxD): 120x120x240 mm (4.7x4.7x9.4 in). Weight: 1,4 kg (3 lb).



Art.-Nr.	€	
VP1055.01	-	01

Kiri

Purifying Active Substance for Kemuri

- EN1276, EN 14476, EN1650, EN16777, EN 13697 certified.
- Registered disinfectant in Germany (Reg. N-108918), Austria, and the UK.
- Powerful purifying action: 1 mL to purify 1 m³ (0.033 fl oz to purify 35 ft³).
- Lemon tree scented.

Art.-Nr.	€	
AB1109.Y.01	-	12



50 mL



Interior Purifier

Purifying Interior Treatment

- Saturates the environment with purifying molecules thanks to the continuous flow coming out from the total release aerosol can.
- Removes contaminants from surfaces and A/C ducts.
- Does not wet or leave marks. Ventilate the room after the treatment.
- For a complete purifying action, Errecom recommends using first Evaporator Cleaner Foam or Evaporator Cleaner. Registered disinfectant in Germany (N-108928).



BY ANNATWELVE	BOREAL	ROYALE	€	
Art.-Nr.	Art.-Nr.	Art.-Nr.		
200 mL	AB1235.J.01	AB1236.J.01	-	24

	Talc	Strawberry	Peach	Mint	Lemon	Vanilla	Green Apple	€	
	Art.-Nr.								
200 mL	AB1056.J.01	AB1057.J.01	AB1058.J.01	AB1050.J.01	AB1059.J.01	AB1060.J.01	AB1061.J.01	-	24
400 mL	AB1056.N.01	AB1057.N.01	AB1058.N.01	AB1050.N.01	AB1059.N.01	AB1060.N.01	AB1061.N.01	-	12

Pure Zone Machine

Professional Ultrasonic Nebuliser

Technical Features:

- Power supply: 100-220 V - 50/60 Hz.
- Schuko plug.
- Power supply: 12 V with cigarette lighter socket adapter.
- Cycle time: 11' 45" at 20°C.
- Automatic switch-off when minimum liquid is reached.
- Noise level: ≤ 70 dB.
- Operating temperature: 0°C ÷ 60°C.
- Nebulisation rate: ≈ 500 mL/h.
- Fan flow: 34 m³/h.
- Size: L285 X P130 X H210 mm.
- Weight: 3.1 Kg.



Art.-Nr.	Description	€	
AB1032	PureZone Machine	-	01

Haze

Purifying Treatment for Ultrasonic Nebulisers

HAZE is a purifying liquid to be used with ultrasonic nebulisers.

	Pure Art.-Nr.	Mint Art.-Nr.	Lemon Art.-Nr.	€		
120 mL	AB1240.G.01	AB1239.G.01	AB1238.G.01	-	12	-
200 mL	AB1240.J.01	AB1239.J.01	AB1238.J.01	-	10	-
5 L	AB1240.P.01	AB1239.P.01	AB1238.P.01	-	02	-
10 L	AB1240.D.01	AB1239.D.01	AB1238.D.01	-	01	-

	Smoki Art.-Nr.	Woofi Art.-Nr.	No Odor Art.-Nr.	€		
120 mL	AB1242.G.01	AB1241.G.01	AB1252.G.01	-	12	-
200 mL	AB1242.J.01	AB1241.J.01	AB1252.J.01	-	10	-
5 L	AB1242.P.01	AB1241.P.01	AB1252.P.01	-	02	-
10 L	AB1242.D.01	AB1241.D.01	AB1252.D.01	-	01	-



Room Care

Indoor Air Quality Treatment

- Consists of two aerosol cans, EVAPORATOR CLEANER and INTERIOR PURIFIER, which guarantee deep and complete purification of A/C ducts and rooms up to 20 m² (215 ft²).
- Removes dust, allergens, and contaminants from evaporator coils and surfaces.
- Ready and easy to use.
- Does not wet or leave marks.
- Does not require rinsing.
- Ventilate the room after the treatment.
- 7 scents available.



200 mL

ROOM CARE (Evaporator Cleaner + Interior Purifier)

Talc Art.-Nr.	Strawberry Art.-Nr.	Peach Art.-Nr.	Mint Art.-Nr.	Lemon Art.-Nr.	Vanilla Art.-Nr.	Green Apple Art.-Nr.	€	
RKAB61.S1	RKAB62.S1	RKAB63.S1	RKAB64.S1	RKAB65.S1	RKAB66.S1	RKAB67.S1	-	12

Interior Purifier PRO

High-pressure Purifying Treatment for Interiors

- 600 mL can: quickly purifies room up to 70 m² – 753 ft².
- Ideal to purify offices, shops, restaurants, schools, classrooms, etc.
- Easy to use: it takes only 30 seconds to purify 70 m² (753 ft²) thanks to the high-pressure format (20 mL/second).
- Removes and eliminates contaminants, dust, allergens, etc.
- Ready to use.
- Scented.

Art.-Nr.	Description	€			
AB1229.U.01	600mL can	-	12	1008	1176



600 mL



Monsoon

High-pressure Scented Treatment for Interiors

- In just a few seconds, it leaves a pleasant scent throughout the room.
- Long-lasting scent.
- Available in 3 fragrances and the new odour-removing formulation to eliminate bad odours of any kind.

Art.-Nr.	Description	€			
AB1216.U.01	Lemon can	-	12	1008	1176
AB1217.U.01	Mint can	-	12	1008	1176
AB1218.U.01	Pure can	-	12	1008	1176
AB1224.U.01	No Odor can	-	12	1008	1176



600 mL



SaniBact

Concentrated Virucidal and Bactericidal Disinfectant for Surfaces

- Disinfectant certified in the United Kingdom, Germany, Italy (registration N20145), France, Portugal, Poland, and Israel.
- Highly concentrated disinfectant.
- Dilution: 1:16 to obtain virucidal efficacy - 1:25 to obtain bactericidal efficacy
- Tested against coronavirus.
- Tested against influenza, hepatitis B/C, HIV, ebola, rotavirus, norovirus.
- Tested against bacteria: EN1276 – EN13697.
- Tested against moulds: EN13697.
- Removes viruses, germs, mould, and bacteria from high-touch surfaces.
- Perfect to sanitise hospitals, clinics, schools, gyms, pubs, restaurants, hotels, etc.
- Can be applied both in liquid and foam form thanks to the special trigger.
- Its formulation is based on 3 active substances that work together, making SaniBact a powerful disinfectant, suitable to be used in different circumstances.
- Acts in just 5 minutes.
- Safe for all surfaces: it does not leave aggressive chemical residues.
- HACCP compliant.



Art.-Nr.	Description	€			
AB1085.K.S1	1 L spray bottle	-	06	576	576
AB1085.P.01	5 L tank	-	02	168	196
AB1085.D.01	10 L tank	-	01	-	-
AB1085.M.01	500 mL bottle	-	12	972	1080
AB1085.Q.S1	250 mL bottle	-	24	2592	2592



SmartBact

RTU Disinfectant Kit for Surfaces

- Consists of a 500 mL bottle of SaniBact, a 20 mL measuring cap and a 500 mL spray bottle.

Art.-Nr.	Description	€			
RKAB86.S1	1 L SmartBact	-	08	-	-
RKAB85.S1	500 mL SmartBact	-	09	-	-



Odour Removal Treatments for Environments and Surfaces



Smoki Cigarette Odour Remover

- Ideal to be applied directly on smelly surfaces.
- Does not cover the smoke odour but eliminates it permanently by incorporating its molecules.
- Safe for all surfaces.
- Does not require to ventilate the room after the treatment.
- Long-lasting efficacy.

Art.-Nr.	Description	€			
AB1087.K.S1	1 L spray bottle	-	06	576	576
AB1087.J.01	200 mL can	-	12	2880	3168

READY TO USE
RTU



Woofi Pet Odour Remover

- Ideal to be applied directly on smelly surfaces.
- Does not cover the pet odour but eliminates it permanently by incorporating its molecules.
- Safe for pets.
- Does not damage surfaces.
- Does not require to ventilate the room after the treatment.
- Long-lasting efficacy.

Art.-Nr.	Description	€			
AB1088.K.S1	1 L spray bottle	-	06	576	576
AB1088.J.01	200 mL can	-	12	2880	3168



No Odor Intense Bad Smell Remover

- Ideal to be applied directly on smelly surfaces such as floors, trash bins, drains, etc.
- Does not cover bad odours but eliminates them permanently by incorporating their molecules. Long-lasting efficacy.
- Highly powerful formulation, effective even against the most unpleasant odours.
- Safe for all surfaces (metals, plastics, etc.).
- HACCP compliant.

Art.-Nr.	Description	€			
AB1066.K.S1	1 L spray bottle	-	06	576	576
AB1066.P.01	5 L tank	-	02	144	144
AB1066.D.01	10 L tank	-	01	-	-



Uklin Urine Odour Remover

- Ideal to be applied directly on smelly surfaces such as doorways, passageways, floors, etc.
- Does not cover urine odour but eliminates it permanently by incorporating its molecules. Long-lasting efficacy.
- Generates a repellent effect on pets, correcting bad habits and preventing them from urinating on the treated area. Safe for pets.
- Pleasant scent for humans.
- Can be sprayed on all surfaces (metal, plastics, wood, cement, etc.). Does not damage materials and leaves no residue.

Art.-Nr.	Description	€			
AB1091.K.S1	1 L spray bottle	-	06	576	576
AB1091.P.01	5 L tank	-	02	144	144
AB1091.D.01	10 L tank	-	01	-	-



07

Cleaning and Maintenance
of Outdoor Units



Jet Gun

Portable A/C Coil Cleaning Machine

- Designed and tested for use with water, acid and alkaline cleaners.
- Increases the cleaning power of Errecom's cleaners without damaging evaporator and condenser coils.
- Safe for all components of air conditioning and refrigeration systems.
- Working pressure: 6 bar (85 psi).
- 3 interchangeable and resealable 9 Litre (2.4 gal) bags.
- Adjustable spray tip.
- Hose length: 300 cm (118 in).
- Rechargeable battery 12 V - 2,200 mAh.
- Operating time: up to 30 minutes.
- Includes battery charger 110-220 V.



Art.-Nr.	Description	€		
VP1050.01	JETGUN	-	01	-
VP1052.01	JETGUN PRO	-	01	-

Spare Parts Jet Gun

Art.-Nr.	Description	
RP1067.01	Dispensing gun	01
RG9014.05	Plastic quick coupler seals	01
RV6037.01	Plastic female quick coupler for black hose	01
RV6039.01	Plastic female fitting for connecting bags	01
RV6038.01	Plastic male fitting for connecting bags	01
TB1025.01	3 m PVC hose	01
PW1007.01	12,000 mAh lithium-ion battery	01
PW1005.01	Charger	01
RPL001.01	Shoulder strap	01
FL1100.01	Plastic bag	01
VP1059.01	Motor pump	01



Spray Pumps

It is a tank that can be manually pressurised and resists acid cleaners, whose adjustable nozzle allows any type of cleaner to be dispensed directly onto evaporators and condensers.

Art.-Nr.	Description	€	
PM1001.01	2 L spray pump	-	01
PM1003.01	10 L spray pump	-	01



Alkaline Cleaners

Errecom's **condenser cleaners** are alkaline cleaners developed to **remove** the most stubborn deposits of **organic residues, grease, oil, dust, pollen, and smog** from outdoor units. They quickly and effectively degrease the treated surfaces and are particularly indicated for removing dirt settled on coils.

They can be diluted with water according to the dilution ratio specified on the product: the higher this ratio, the higher the concentration of active substances contained in the cleaner.

Avoid contact with varnished surfaces. Rinse the condenser thoroughly after application.

Alkaline Tabs

Cleaning Alkaline Tabs for Condensers

- 1 tab (20g) to obtain 5 L of ready-to-use degreaser cleaner.
- Can be used with any water, even the hardest one.
- Recommended for recurring cleaning.
- Releases a pleasant scent.

Art.-Nr.	€			
AB1221.01.JA	-	12	-	-

1x5L
DILUTION



Alkaline Ultra

Alkaline Condenser Cleaner

- Active substance for deep and effective cleaning of condensers.
- 1:20 dilution.
- Can be diluted with any type of water, even the hardest one.
- Leaves no marks or residues on treated surfaces.
- Eco-friendly glass packaging.

Art.-Nr.	€			
AB1223.Q.S1	-	24	-	-

1:20
MAX DILUTION

250 mL



Nano Alkaline Cleaner

Alkaline Condenser Cleaner

- Effective foaming action.

Art.-Nr.	Description	€			
AB1106.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1106.K.C1	1L bottle	-	06	576	576
AB1106.P.01	5 L tank	-	02	144	144
AB1106.D.01	10 L tank	-	01	-	-



1:8
MAX DILUTION



Restore

Mild Alkaline Condenser Cleaner

- Particularly suitable to be used in environments with food.
- Powerful purifying action.
- Ideal to be used for regular cleaning.

Art.-Nr.	Description	€			
AB1067.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1067.K.C1	1L bottle	-	06	576	576
AB1067.P.01	5 L tank	-	02	144	144
AB1067.D.01	10 L tank	-	01	-	-



EcoRestore

Biodegradable Alkaline Condenser Cleaner

- Highly biodegradable formula whose values are even higher than those required by current European legislation.
- Contains only natural surfactants.
- Does not contain acids, phosphates, solvents, or soda.
- OEM approved.

Art.-Nr.	Description	€			
AB1072.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1072.K.C1	1L bottle	-	06	576	576
AB1072.P.01	5 L tank	-	02	144	144
AB1072.D.01	10 L tank	-	01	-	-



Chisel

Alkaline Descaler Cleaner with Anticorrosive Action for Condensers

- Powerful descaling action: acts like an acid-based cleaner, removing the most stubborn salt deposits.
- Anticorrosive formula.
- Ideal for restoring unkept outdoor units.
- Recommended for applications in very aggressive environments.

Art.-Nr.	Description	€			
AB1070.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1070.K.C1	1L bottle	-	06	576	576
AB1070.P.01	5 L tank	-	02	144	144
AB1070.D.01	10 L tank	-	01	-	-



No-Age

Anticorrosive Protective Treatment for Outdoor Units

- Creates a protective film that defends surfaces from contaminants such as salt and smog, preventing metal corrosion.
- Maintains unaltered heat exchange.
- Ideal to use on condensers installed in highly oxidising environments (seaside locations, heavily polluted areas) and subject to salt, acid rain, and smog attack.

Art.-Nr.	Description	€			
AB1100.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1100.K.C1	1L bottle	-	06	576	576
AB1100.P.01	5 L tank	-	02	144	144
AB1100.D.01	10 L tank	-	01	-	-



□ Acid Cleaners

Errecom's **acid condenser cleaners** are developed to **remove** the most stubborn encrustations, such as **limestone, salt, rust, concrete, and chalk residues**. They quickly and effectively descale the treated surfaces and are particularly suitable for removing dirt settled on coils. They can be diluted with water according to the dilution ratio specified on the product: the higher this ratio, the higher the concentration of active substances contained in the cleaner.

Avoid contact with varnished surfaces. Rinse the condenser thoroughly after application.

□ Nano Acid Cleaner

Concentrated Acid Condenser Cleaner

- Effective foaming and powerful descaling action.

Art.-Nr.	Description	€			
AB1107.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1107.K.C1	1L bottle	-	06	576	576
AB1107.P.01	5 L tank	-	02	144	144
AB1107.D.01	10 L tank	-	01	-	-



□ Best Acid Cond Cleaner

Concentrated Acid Condenser Cleaner

- Effective foaming action.

Art.-Nr.	Description	€			
AB1044.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1044.K.C1	1L bottle	-	06	576	576
AB1212.P.01	5 L tank	-	02	144	144
AB1212.D.01	10 L tank	-	01	-	-



□ PSD Coil Cleaner

Acid Condenser Coil Cleaner

- Affordable and effective cleaning.

Art.-Nr.	Description	€			
AB1245.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1245.K.C1	1L bottle	-	06	576	576
AB1245.P.01	5 L tank	-	02	144	144



Acid Ultra

Acid Condenser Cleaner

- Active substance for deep and effective cleaning of condensers.
- 1:20 dilution.
- Can be diluted with any type of water, even the hardest one.
- Leaves no marks or residues on treated surfaces.
- Eco-friendly glass packaging.

Art.-Nr.	€			
AB1222.Q.S1	-	24	-	-

1:20
MAX DILUTION



250 mL

Acid Tabs

Cleaning Acid Tabs for Condensers

- 1 tab (20g) to obtain 5 L of ready-to-use descaler cleaner.
- Can be used with any water, even the hardest one.
- Recommended for recurring cleaning.
- Releases a pleasant scent.

Art.-Nr.	€			
AB1102.01.JA	-	12	-	-

1x 5L
DILUTION



Power Clean-OUT

Alkaline High-pressure Condenser Cleaner

- Alkaline high-pressure condenser cleaner.
- Safe for condenser coils.
- Easily removes even the most stubborn dirt.

Art.-Nr.	€			
AB1063.YW.01	-	12	840	840



750 mL



Weld+

Cleaner and Booster for Welding

- Optimises and reduces welding and soldering time. ■ Ensures excellent welding tight.
- Ensures thorough cleaning of the surfaces to be welded. ■ Leaves a dry, stain-free surface.
- Easy to use. ■ Safe for the operator. ■ Suitable for use on iron, steel, copper, brass, aluminium.
- Also ideal for welding of copper and copper alloys, copper and steel alloys, copper and brass alloys, copper and bronze alloys, copper and stainless steel alloys, brass and stainless steel alloys.

STEP 1 – Deoxidizing Cleaner

- Removes oxides caused by the atmosphere (rust) and by welding or heat treatments, calamine from metal and steel, oxide layers and encrustations of any kind from alloys such as copper and brass.
- Pickling action.
- Protects surfaces from oxidation for approx. 90 min.

STEP 2 – Protective Neutraliser

- Removes any residues resulting from the application of step 1 and the welding work carried out.
- Prevents the growth of oxides after welding.
- Protects the metal from corrosion by creating a protective film.

Art.-Nr.	€			
TR1194.01	-	12	-	-



Stop Heat

Heat Blocking Putty for Welding

- Absorbs and stops the heat during welding or soldering, preventing the areas around the point from burning or deforming.
- Compatible and safe also for painted or varnished surfaces.
- Putty formulation: it perfectly adheres without dripping, slipping, or leaving residue.
- Re-usable up to 40 times.
- Easy to use.
- Safe and non-toxic formulation.

Art.-Nr.	Description	€			
TR1173.01	500 gr jar	-	12	-	-



Protect Gel

Heat Blocking Gel for Welding

- Protects surrounding surfaces from heat and flame during welding or soldering operations.
- Avoids expensive heat damages by protecting components or materials during welding/soldering.
- Compatible and safe also for painted or varnished surfaces.
- Gel formulation: it perfectly adheres without dripping, staining, or leaving residue.
- Easy to use.
- Safe and non-toxic formulation.

Art.-Nr.	Description	€	📦	🔧	🔧
TR1141.K.01	1 L spray bottle	-	06	-	-



Shield-It

Protective Barrier Spray for Welding

- Creates a protective barrier on the area during welding operations.
- Prevents drops of filler material from sticking to metals and materials near the welding area.
- Protects surfaces from oxidation and corrosion.
- Simple and easy to use.
- Silicone-free formula.

Available in 3 formats:

- Shield-It: solvent-based aerosol formulation;
- Shield-It H₂O: non-flammable water-based formulation;
- Shield-It CO₂: non-flammable CO₂-based formulation.

Art.-Nr.	Description	€	📦	🔧	🔧
TR1165.N.01	Shield-It 400 mL aerosol can	-	12	1248	1404
TR1164.N.01	Shield-It H ₂ O 400 mL aerosol can	-	12	1248	1404
TR1207.N.01	Shield-It CO ₂ 400 mL aerosol can	-	12	1248	1404



Crack Finder Kit

Kit to Detect Cracks

Crack Finder Kit accurately detects cracks, flaws, post-weld air holes or porous areas on surfaces.

Instructions:

- Thoroughly clean and degrease the surface with CRACK CLEANER.
- Apply a thin layer of CRACK FILLER to the surface and wait for approximately 15/20 minutes.
- Remove CRACK FILLER with CRACK CLEANER.
- Let the surface dry.
- Apply CRACK DETECTOR and wait for a few minutes.
- Red marks will form near the cracks: you can now repair them.

Art.-Nr.	Description	€	📦	🔧	🔧
RK1602	Crack Finder Kit	-	-	-	-
TR1208.N.01	Crack Cleaner - 400 mL aerosol can	-	12	1248	1404
TR1209.N.01	Crack Filler - 400 mL aerosol can	-	12	1248	1404
TR1210.N.01	Crack Detector - 400 mL aerosol can	-	12	1248	1404





Water Pipe Markers

Regulation EC 1272/2008 and subsequent updating - CLP

Self-adhesive pipe marking labels to identify piping systems conveying water and the direction of flow as regulated by the CLP regulation and ISO 20560.

- Sheet with 6 pre-cut self-adhesive labels.
- Size 230 x 30mm.
- Colour: Green - RAL 6032.
- Customisable on request.

6-label pack

Art.Nr	Label text	€	♻️
ADS001.S.DX.IT	WATER SUPPLY →	-	01
ADS001.S.SX.IT	← WATER SUPPLY	-	01
ADS002.S.DX.IT	WATER RETURN →	-	01
ADS002.S.SX.IT	← WATER RETURN	-	01
ADS003.S.DX.IT	WATER SUPPLY →	-	01
ADS003.S.SX.IT	← WATER SUPPLY	-	01
ADS004.S.DX.IT	WATER RETURN →	-	01
ADS004.S.SX.IT	← WATER RETURN	-	01
ADS005.S.DX.IT	HOT WATER →	-	01
ADS005.S.SX.IT	← HOT WATER	-	01
ADS006.S.DX.IT	COLD WATER →	-	01
ADS006.S.SX.IT	← COLD WATER	-	01
ADS007.S.DX.IT	DOMESTIC HOT WATER →	-	01
ADS007.S.SX.IT	← DOMESTIC HOT WATER	-	01
ADS008.S.DX.IT	DOMESTIC COLD WATER →	-	01
ADS008.S.SX.IT	← DOMESTIC COLD WATER	-	01
ADS009.S.DX.IT	SOFTENED COLD WATER →	-	01
ADS009.S.SX.IT	← SOFTENED COLD WATER	-	01
ADS010.S.DX.IT	CONDENSATE WATER →	-	01
ADS010.S.SX.IT	← CONDENSATE WATER	-	01
ADS011.S.DX.IT	POTABLE WATER →	-	01
ADS011.S.SX.IT	← POTABLE WATER	-	01





PATENT
PENDING



10

Accessories
for A/C Installation

Adjustable Floor Supports for Outdoor Units

- Extremely stable and resistant.
- Ensures quick and safe installation of outdoor units.
- Allows units to be installed even on sloping surfaces/roofs.
- Available in three colours: White (RAL9016); Grey (RAL9018); Black (RAL9004).



RAL9016

RAL9018

RAL9004



Steady

Technical features:

- Supports up to 1500 kg.
- Height adjustable from 165 mm to 255 mm.
- Can be tilted up to 35°.
- 360° rotation.
- 6 mm anti-vibration rubber base.
- 6 holes floor mounting base.

1-piece pack

Art.-Nr.	Colour	€			
RS1011W.01	RAL9016	-	01	-	-
RS1011G.01	RAL9018	-	01	-	-
RS1011N.01	RAL9004	-	01	-	-

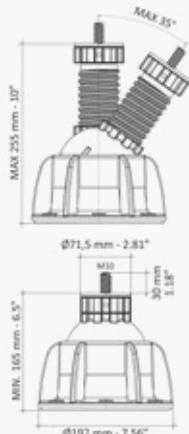



Mini Steady

Technical features:

- Supports up to 1000 kg.
- Height adjustable from 118 mm to 148 mm.
- Can be tilted up to 30°.
- 360° rotation.

4-piece pack.

Art.-Nr.	Colour	€			
RS1014W.01	RAL9016	-	01	-	-
RS1014G.01	RAL9018	-	01	-	-
RS1014N.01	RAL9004	-	01	-	-

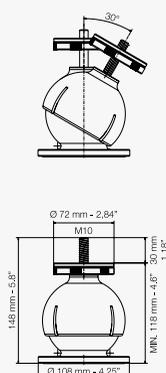

Manifolds for Air Conditioning and Refrigeration Systems



Ball Valves with In-line Swivel Connection

Art.-Nr.	Male	Female	
RP1119.R1.*S1	1/4 SAE	1/4 SAE	01
RP1819.R1.*S1	1/4 SAE	3/8 SAE	01
RP1919.R1.*S1	3/8 SAE	3/8 SAE	01
RP1035.R1.*S1	1/2 ACME	1/4 SAE	01
RP1719.R1.*S1	1/4 SAE	5/16 SAE	01
RP1319.R1.*S1	5/16 SAE	1/4 SAE	01
RP1619.R1.*S1	5/16 SAE	5/16 SAE	01

* ADD TO ART-NR: Y = YELLOW VALVE, B = BLUE VALVE, R = RED VALVE, G = GREEN VALVE, W = WHITE VALVE



Ball Valves with In-line Swivel Connection 45°

Art.-Nr.	Male	Female	
RP1170.R1.*	1/4 SAE	1/4 SAE	01
RP1270.R1.*	3/8 SAE	1/4 SAE	01
RP1370.R1.*	5/16 SAE	1/4 SAE	01
RP1770.R1.*	1/4 SAE	5/16 SAE	01
RP1670.R1.*	5/16 SAE	5/16 SAE	01

* ADD TO ART-NR: Y = YELLOW VALVE, B = BLUE VALVE, R = RED VALVE, G = GREEN VALVE, W = WHITE VALVE



Ball Valves with In-line Swivel Connection 90°

Art.-Nr.	Male	Female	
RP1171.R1.*	1/4 SAE	1/4 SAE	01
RP1371.R1.*	5/16 SAE	1/4 SAE	01
RP1771.R1.*	1/4 SAE	5/16 SAE	01
RP1671.R1.*	5/16 SAE	5/16 SAE	01

* ADD TO ART-NR: Y = YELLOW VALVE, B = BLUE VALVE, R = RED VALVE, G = GREEN VALVE, W = WHITE VALVE



Ball Valves with Male Fitting

Art.-Nr.	Description	
RP1631.R1.*S1	1/4 SAE x 1/4 SAE	01
RP1636.R1.*S1	5/16 SAE x 5/16 SAE	01

* ADD TO ART-NR: Y = YELLOW VALVE, B = BLUE VALVE, R = RED VALVE, G = GREEN VALVE, W = WHITE VALVE



Spare Parts for Charging Hoses and Ball Valves

Art.-Nr.	Description		€
RG9010.01	Gasket in HNBR for 1/4 - 5/16 SAE - 1/2 ACME	01	-
RG9012.01	Gasket in NEOPRENE for 1/4 - 5/16 SAE - 1/2 ACME	01	-
RG9002.01	Gasket in HNBR for 3/8 SAE	01	-
TBR901.01	Hose Depressor	01	-



Shut-Off

Art.-Nr.	Description		€
RV6047.S1	1/4 M x 1/4 SAE - Black	01	-
RV6048.S1	1/4 M x 5/16 SAE - Green	01	-



□ In-line swivel connections 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7451B	TB7451R	TB7451Y	-
150	TB7802B	TB7802R	TB7802Y	-
200	TB7551B	TB7551R	TB7551Y	-
300	TB7651B	TB7651R	TB7651Y	-
350	TB7751B	TB7751R	TB7751Y	-

□ In-line swivel connections 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7452B	TB7452R	TB7452Y	-
150	TB7803B	TB7803R	TB7803Y	-
200	TB7552B	TB7552R	TB7552Y	-
300	TB7652B	TB7652R	TB7652Y	-
350	TB7752B	TB7752R	TB7752Y	-

□ In-line swivel connections at 45° 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7487B	TB7487R	TB7487Y	-
150	TB7804B	TB7804R	TB7804Y	-
200	TB7587B	TB7587R	TB7587Y	-
300	TB7283B	TB7283R	TB7283Y	-
350	TB7907B	TB7907R	TB7907Y	-

□ In-line swivel connections at 45° 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7488B	TB7488R	TB7488Y	-
150	TB7805B	TB7805R	TB7805Y	-
200	TB7588B	TB7588R	TB7588Y	-
300	TB7284B	TB7284R	TB7284Y	-
350	TB7908B	TB7908R	TB7908Y	-

□ In-line swivel connections at 90° 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7489B	TB7489R	TB7489Y	-
150	TB7806B	TB7806R	TB7806Y	-
200	TB7589B	TB7589R	TB7589Y	-
300	TB7285B	TB7285R	TB7285Y	-
350	TB7909B	TB7909R	TB7909Y	-

□ In-line swivel connections at 90° 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7490B	TB7490R	TB7490Y	-
150	TB7807B	TB7807R	TB7807Y	-
200	TB7590B	TB7590R	TB7590Y	-
300	TB7286B	TB7286R	TB7286Y	-
350	TB7910B	TB7910R	TB7910Y	-

□ Ball valve 1/4 SAE connection

Cm	Blue	Red	Yellow	€
100	TB7463B	TB7463R	TB7463Y	-
150	TB7808B	TB7808R	TB7808Y	-
200	TB7563B	TB7563R	TB7563Y	-
300	TB7663B	TB7663R	TB7663Y	-
350	TB7763B	TB7763R	TB7763Y	-

□ Ball valve 5/16 SAE connection

Cm	Blue	Red	Yellow	€
100	TB7464B	TB7464R	TB7464Y	-
150	TB7809B	TB7809R	TB7909Y	-
200	TB7564B	TB7564R	TB7564Y	-
300	TB7664B	TB7664R	TB7664Y	-
350	TB7764B	TB7764R	TB7764Y	-

□ Ball valve at 45° 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7491B	TB7491R	TB7491Y	-
150	TB7810B	TB7810R	TB7810Y	-
200	TB7591B	TB7591R	TB7591Y	-
300	TB7287B	TB7287R	TB7287Y	-
350	TB7911B	TB7911R	TB7911Y	-

□ Ball valve at 45° 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7492B	TB7492R	TB7492Y	-
150	TB7811B	TB7811R	TB7811Y	-
200	TB7592B	TB7592R	TB7592Y	-
300	TB7288B	TB7288R	TB7288Y	-
350	TB7912B	TB7912R	TB7912Y	-

□ Ball valve at 90° 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7493B	TB7493R	TB7493Y	-
150	TB7812B	TB7812R	TB7812Y	-
200	TB7593B	TB7593R	TB7593Y	-
300	TB7289B	TB7289R	TB7289Y	-
350	TB7913B	TB7913R	TB7913Y	-

□ Ball valve at 90° 5/16 SAE


Cm	Blue	Red	Yellow	€
100	TB7494B	TB7494R	TB7494Y	-
150	TB7813B	TB7813R	TB7813Y	-
200	TB7594B	TB7594R	TB7594Y	-
300	TB7290B	TB7290R	TB7290Y	-
350	TB7914B	TB7914R	TB7914Y	-

□ Shut-Off 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7925B	TB7925R	TB7925Y	-
150	TB7927B	TB7927R	TB7927Y	-
200	TB7929B	TB7929R	TB7929Y	-
300	TB7931B	TB7931R	TB7931Y	-
350	TB7933B	TB7933R	TB7933Y	-

□ Shut-Off 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7926B	TB7926R	TB7926Y	-
150	TB7928B	TB7928R	TB7928Y	-
200	TB7930B	TB7930R	TB7930Y	-
300	TB7932B	TB7932R	TB7932Y	-
350	TB7934B	TB7934R	TB7934Y	-

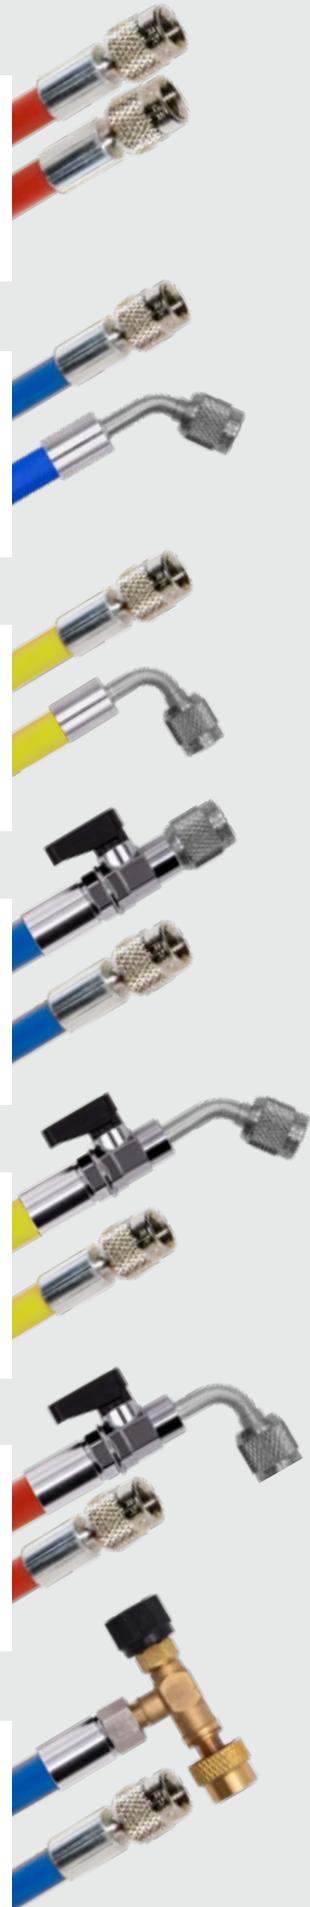

□ In-line swivel connections 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7401B	TB7401R	TB7401Y	-
150	TB7814B	TB7814R	TB7814Y	-
200	TB7501B	TB7501R	TB7501Y	-
300	TB7601B	TB7601R	TB7601Y	-
350	TB7701B	TB7701R	TB7701Y	-

□ In-line swivel connections 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7402B	TB7402R	TB7402Y	-
150	TB7815B	TB7815R	TB7815Y	-
200	TB7502B	TB7502R	TB7502Y	-
300	TB7602B	TB7602R	TB7602Y	-
350	TB7702B	TB7702R	TB7702Y	-

□ In-line swivel connections at 45° 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7495B	TB7495R	TB7495Y	-
150	TB7816B	TB7816R	TB7816Y	-
200	TB7595B	TB7595R	TB7595Y	-
300	TB7291B	TB7291R	TB7291Y	-
350	TB7915B	TB7915R	TB7915Y	-

□ In-line swivel connections at 45° 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7496B	TB7496R	TB7496Y	-
150	TB7817B	TB7817R	TB7817Y	-
200	TB7596B	TB7596R	TB7596Y	-
300	TB7292B	TB7292R	TB7292Y	-
350	TB7916B	TB7916R	TB7916Y	-

□ In-line swivel connections at 90° 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7497B	TB7497R	TB7497Y	-
150	TB7818B	TB7818R	TB7818Y	-
200	TB7597B	TB7597R	TB7597Y	-
300	TB7293B	TB7293R	TB7293Y	-
350	TB7917B	TB7917R	TB7917Y	-

□ In-line swivel connections at 90° 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7498B	TB7498R	TB7498Y	-
150	TB7819B	TB7819R	TB7819Y	-
200	TB7598B	TB7598R	TB7598Y	-
300	TB7294B	TB7294R	TB7294Y	-
350	TB7918B	TB7918R	TB7918Y	-

□ Ball valve 1/4 SAE connection

Cm	Blue	Red	Yellow	€
100	TB7413B	TB7413R	TB7413Y	-
150	TB7820B	TB7820R	TB7820Y	-
200	TB7513B	TB7513R	TB7513Y	-
300	TB7613B	TB7613R	TB7613Y	-
350	TB7713B	TB7713R	TB7713Y	-

□ Ball valve 5/16 SAE connection

Cm	Blue	Red	Yellow	€
100	TB7414B	TB7414R	TB7414Y	-
150	TB7821B	TB7821R	TB7821Y	-
200	TB7514B	TB7514R	TB7514Y	-
300	TB7614B	TB7614R	TB7614Y	-
350	TB7714B	TB7714R	TB7714Y	-

□ Ball valve at 45° 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7499B	TB7499R	TB7499Y	-
150	TB7822B	TB7822R	TB7822Y	-
200	TB7599B	TB7599R	TB7599Y	-
300	TB7295B	TB7295R	TB7295Y	-
350	TB7919B	TB7919R	TB7919Y	-

□ Ball valve at 45° 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7901B	TB7901R	TB7901Y	-
150	TB7823B	TB7823R	TB7823Y	-
200	TB7904B	TB7904R	TB7904Y	-
300	TB7296B	TB7296R	TB7296Y	-
350	TB7920B	TB7920R	TB7920Y	-

□ Ball valve at 90° 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7902B	TB7902R	TB7902Y	-
150	TB7824B	TB7824R	TB7824Y	-
200	TB7905B	TB7905R	TB7905Y	-
300	TB7297B	TB7297R	TB7297Y	-
350	TB7921B	TB7921R	TB7921Y	-

□ Ball valve at 90° 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7903B	TB7903R	TB7903Y	-
150	TB7825B	TB7825R	TB7825Y	-
200	TB7906B	TB7906R	TB7906Y	-
300	TB7298B	TB7298R	TB7298Y	-
350	TB7922B	TB7922R	TB7922Y	-

□ Shut-Off 1/4 SAE

Cm	Blue	Red	Yellow	€
100	TB7935B	TB7935R	TB7935Y	-
150	TB7937B	TB7937R	TB7937Y	-
200	TB7939B	TB7939R	TB7939Y	-
300	TB7941B	TB7941R	TB7941Y	-
350	TB7943B	TB7943R	TB7943Y	-

□ Shut-Off 5/16 SAE

Cm	Blue	Red	Yellow	€
100	TB7936B	TB7936R	TB7936Y	-
150	TB7938B	TB7938R	TB7938Y	-
200	TB7940B	TB7940R	TB7940Y	-
300	TB7942B	TB7942R	TB7942Y	-
350	TB7944B	TB7944R	TB7944Y	-



1-Way Manifold

With bar/psi Gauge

Art.-Nr.	Fitting	Ø Pressure Gauge	Colour	Type	Refrigerant Scale	Class	€
MN1115.01	1/4 SAE	68 mm	Red	HP	R32 - R410a	1.0	-
MN1116.01	5/16 SAE	68 mm	Red	HP	R32 - R410a	1.0	-
MN1117.01	1/4 SAE	68 mm	Blue	LP	R32 - R410a	1.0	-
MN1118.01	5/16 SAE	68 mm	Blue	LP	R32 - R410a	1.0	-



2-Way Manifold

With Diaphragm Valve and bar/psi Gauge


Art.-Nr.	Fitting	Ø Pressure Gauge	Refrigerant Scale	Class	€
MN1119.01	1/4 SAE	68 mm	R32 - R410a	1.0	-
MN1120.01	5/16 SAE	68 mm	R32 - R410a	1.0	-
MN1002.01	1/4 SAE	80 mm	R410a	1.6	-
MN.1003.01	5/16 SAE	80 mm	R410a	1.6	-



4-Way Manifold

With Diaphragm Valve and bar/psi Gauge

Art.-Nr.	Fitting	Ø Pressure Gauge	Refrigerant Scale	Class	€
MN1121.01	1/4 SAE	68 mm	R32 - R410a	1.0	-
MN1122.01	5/16 SAE	68 mm	R32 - R410a	1.0	-
MN1005.01	1/4 SAE	80 mm	R410a	1.6	-
MN1006.01	5/16 SAE	80 mm	R410a	1.6	-

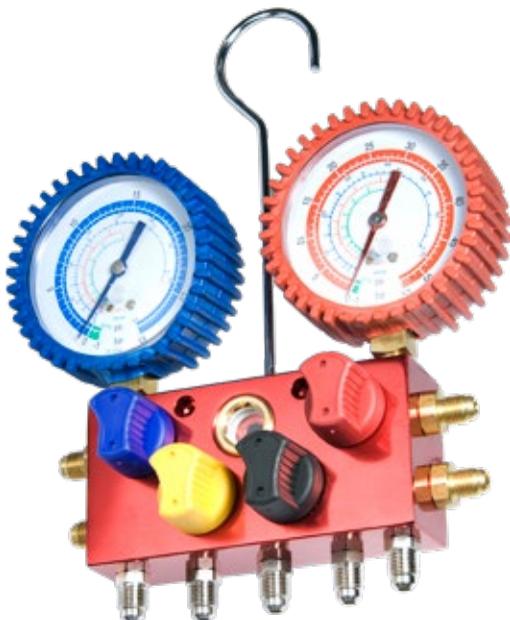

4-Way Manifold

With Diaphragm Valve and bar/psi Gauge

Art.-Nr.	Fitting	Ø Pressure Gauge	Refrigerant Scale	Class	€
MN1123.01	1/4 SAE	68 mm	R32 - R410a	1.0	-
MN1124.01	5/16 SAE	68 mm	R32 - R410a	1.0	-
-	1/4 SAE	80 mm	R410a	1.0	-
-	5/16 SAE	80 mm	R410a	1.0	-

Smart Tester

Test for Air Conditioning and Refrigeration Systems

SMART TESTER is an extremely simple and innovative equipment to check and, if necessary, add refrigerant gas in A/C systems without using any other equipment (scale, hoses and manifold gauges).

- Ergonomic handle.
- Plastic case.
- 68 mm Ø gauge.

Art.-Nr.	€	🗑️
MN1091.01	-	01



Two-stage High Vacuum Pumps

- Capacity: 70 L/min.
- Ultimate vacuum: 0.003 mbar.
- 1/4 SAE male thread.
- Intake solenoid valve.
- Vacuum gauge: ø 80 mm class 1.6.
- Amount of oil: 250 mL.
- Power supply: 220 v/50 hz.
- Size: 315x124x240 mm.
- Weight: 8.6 Kg.

Art.-Nr.	€	🗑️
VP1017.01	-	01



High Vacuum Hose

High Vacuum Rubber Hose with 3/8 SAE Female Fitting

- Withstands temperatures from -40°C a + 82°C (-40°F to +180°F).
- Standard working pressure: 51 bar (750 psi).
- Burst pressure: 206 bar (3000 psi).
- Ø INNER: 8.1 mm (0.32 inch).
- Ø OUTER: 13.8 mm (0.545 inch).


Art.-Nr.	Description	€	🗑️
TB5196Y	150 cm hose	-	01
TB5197Y	240 cm hose	-	01



Condenser Fin Comb and Straightener

This is a circular tool with 6 segments that straighten evaporator and condenser aluminium fins without damaging them. It can be used with fins of the following sizes: 6/8/10/12/14/15.

Art.-Nr.	€	
RL1010.01	-	01

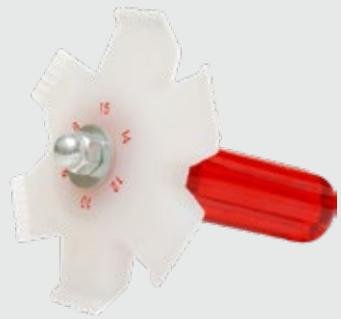

Schrader Valve Removal Tool

Art.-Nr.	€	
RL1001.01	-	01



Schrader Valve

25-piece pack.

Art.-Nr.	€	
RV1001.25	-	01



A/C Valve Core Caps

5-piece pack.

Art.-Nr.	Description	€	
RT1002.05	(A) Plastic Cap 1/4 SAE	-	01
RT1202.05	(B) Brass Cap 5/16 SAE (R410a - R32)	-	01
RT1302.05	(C) Brass Cap with Tool 1/4 SAE	-	01
RT1402.05	(C) Brass Cap with Tool 5/16 SAE (R410a - R32)	-	01



Tappy

AC/R Insulation Tape

Tappy is an insulation tape made of recycled butyl rubber designed to be used in air conditioning and refrigeration systems. It isolates AC/R components whose surfaces have to deal with condensate formation (service valves on condensing units, refrigeration piping, nozzles and couplings).

Technical features:

- Can be used on both cold and hot pipes.
- Perfectly adheres to surfaces of any shape.
- Resists water, water vapour, oxidation, weathering, and ultraviolet rays.
- Stretching (ASTM D1344): >100%.
- Adhesion (ASTM D1344): >150 kPa.
- Working temperature: -40°C / +100°C.
- Transparent film for clean application.
- Does not contain asbestos.
- Width: 50 mm.
- Length: 7,62 m.
- Thickness: 3 mm.
- Weight: 1,6 kg

Art.-Nr.	€	
TR1015.01	-	1

Stretching: >100%



SealUp Removable AC/R Joint Sealant

- Creates a flexible but strong seal on the threaded or flanged AC/R fittings, adhering to internal surfaces and filling all micro-cracks.
- Prevents vibration from loosening nuts, joints, bolts, etc.
- Easy to remove.
- Can be applied on all plastics and metals.
- Temperature range use: -90°C to +200°C (-130°F to +392°F).
- Pressure range use: full vacuum and up to 500 bar/7250 psi.
- Resists refrigerant gases, combustible gases, refrigeration lubricants, fuels, solvents, industrial gases.
- Threaded spout for better sealing.

Art.-Nr.	Description	€				
TR1157.Y.01	50 mL tube	-	30	-	-	-



Thor Sealant Remover and Surface Cleaner

- Removes sealant residues from surfaces. Ideal for cleaning surfaces before using External and FixQuick.
- Quick cleaning action: works in just a few minutes.

Art.-Nr.	Description	€				
TR1013.J.01	200 mL can	-	24	2880	3168	-



200 mL



Ezi Oil Thread Cutting Oil

- Necessary to lubricate copper pipes during flanging.
- Particularly suitable for lubricating drill bits, tap and die sets, reamers and other tools that cut or incise metal.

Art.-Nr.	€				
OL1009.J.01	-	24	2880	3168	-



200 mL





Eco Moka

Natural and Biodegradable Cleaner for Coffee Machines and Electric Kettles

- Environmentally friendly and biodegradable: formulated exclusively with natural and high-quality raw materials (lactic acid).
- Food grade formula: contains ingredients certified for direct food contact.
- Highly effective descaler: safely removes limescale, encrustations, and mould from the internal machine components, guaranteeing excellent hygienic conditions and preventing the formation of new encrustations over time.
- Preserves the taste and aroma of coffee.
- Extends the service life of the machine.
- Compatible with all coffee machines and electric kettles.



NEWS 2023

Art.-Nr.	Description	€			
AB1110.M.S1.EC	500 mL bottle	-	-	-	-



Moka

Cleaner for Coffee Machines and Electric Kettles

- Highly effective descaling formula.
- Safely removes limescale, residues, and mould from the water tank and coffee machine nozzles.
- Regular use prevents the growth of algae and new encrustations.
- Preserves the taste and aroma of coffee.
- Extends the service life of the machine.
- HACCP compliant.
- NSF certified (A3).



Art.-Nr.	Description	€			
AB1081.K.S1	1 L bottle	-	06	576	576
AB1081.P.01	5 L tank	-	02	144	144
AB1081.D.01	10 L tank	-	01	-	-



Greed

Cleaner for Refrigerated Environments

- Completely and quickly removes food residues, grease, encrustations, and mould from the surfaces of refrigerated environments, including those used for food storage (cold storage rooms, refrigerators, freezers, etc.) or from the drains of cold storage rooms.
- Slows down the growth of new contaminants on surfaces.
- Regular use has a preventive effect.
- Requires rinsing.
- Formulated with tasteless raw materials suitable for indirect food contact.
- Any residual product is non-hazardous, as it is formulated with raw materials that comply with Regulation (EC) 1935/2004 - MOCA.
- HACCP compliant.
- NSF certified (A5).

Art.-Nr.	Description	€			
AB1075.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1075.K.C1	1L bottle	-	06	576	576
AB1075.P.01	5 L tank	-	02	144	144
AB1075.D.01	10 L tank	-	01	-	-



SnowPlow

Ice Machine Cleaner

- Effectively and safely removes limescale, mould, residues, algae, and encrustations from ice machine components (tray, nozzle, coil and drain).
- Does not freeze at normal working temperatures.
- If used regularly, it prevents the growth of algae and encrustations.
- Requires rinsing; it is recommended to remove the first ice cubes produced.
- Formulated with tasteless raw materials suitable for indirect food contact.
- Any residual product is non-hazardous, as it is formulated with raw materials that comply with Regulation (EC) 1935/2004 – MOCA.
- HACCP compliant.
- NSF certified (A1, A3).



Art.-Nr.	Description	€			
AB1076.K.S1	1 L bottle	-	06	576	576
AB1076.P.01	5 L tank	-	02	144	144
AB1076.D.01	10 L tank	-	01	-	-



Axe

Freezer De-icer Spray

- Highly effective formula: it quickly melts ice from any surface, especially refrigerator ones.
- Removes ice from condensers and slows down its growth.
- Does not require rinsing.
- Safe: it does not contaminate food.
- HACCP compliant.



Art.-Nr.	Description	€			
AB1082.K.S1	1 L spray bottle - RTU	-	06	576	576



Flow

Alkaline Drain Cleaner

- Removes food, paper, mould and soap from slow sink drain.
- Eliminates unpleasant odours from sinks and drains.
- Can be used in all types of drains, both metal and plastic.
- Ideal for regular maintenance.

Art.-Nr.	Description	€			
AB1080.K.01	1 L bottle	-	06	-	-



Unclog

Heavy Duty Drain Cleaner

- Clears blocked sinks and drains dissolving all food, paper, hair, mould, and soap residues that an alkaline product could not remove.
- Eliminates unpleasant odours from sinks and drains.
- Can be used in all types of drains, both metal and plastic.
- Does not corrode metals: it contains anticorrosive agents to limit aggression of the chrome-plated components of the drain.

Art.-Nr.	Description	€			
AB1079.K.01	1 L bottle	-	06	-	-



Sprinkle

Long-lasting Waterproof Treatment

- Once applied to glass, tiles, and mirrors, it forms a protective thin layer that helps prevent water spots, dirt, and scale build-up.
- Ideal for cleaning shower boxes.
- Leaves no marks or residues.
- Quick and easy to apply.
- Gentle formulation: safe for surfaces.

Art.-Nr.	Description	€			
AB1237.K.S1	1 L spray bottle	-	06	576	576



Sunlit

Acid Cleaner for Solar Thermal and Photovoltaic Panels

- Removes from solar panels heavy-duty encrustations such as salt, rust, limestone, concrete and chalk residues and any further inorganic dirt.
- Long-lasting protection.
- Avoid reduction in systems' performance.
- Ready to use.
- Safe: does not leave stains, resists high temperature and UV rays.
- Application temperature = +5 ÷ +25 °C.
- Enhances the cleaning action of Apollo -Errecom's alkaline cleaner for solar panels.
- Always use Apollo after using Sunlit to neutralise any acidic residues.

Art.-Nr.	Description	€	☑	☑	☑
AB1254.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1254.K.C1	1L bottle	-	06	576	576
AB1254.P.01	5 L tank	-	02	144	144
AB1254.D.01	10 L tank	-	01	-	-



NEWS 2023

Apollo

Alkaline Cleaner for Solar Thermal and Photovoltaic Panels

- Removes even the heaviest and most stubborn dirt such as dust, debris, scale, etc. from solar panels.
- Once rinsed off, it leaves a protective film on the solar panel that slows down the growth of new deposits and protects it from corrosion.
- Restores and maintains the efficiency of solar panels over time.
- Alkaline-based formula.
- Does not damage surfaces; also safe for plastics.
- Safe for solar panels: it does not affect their performances and does not get absorbed.

Art.-Nr.	Description	€	☑	☑	☑
AB1086.K.S1	1 L spray bottle - RTU	-	06	576	576
AB1086.K.C1	1L bottle	-	06	576	576
AB1086.P.01	5 L tank	-	02	144	144
AB1086.D.01	10 L tank	-	01	-	-



Heavy Duty Wipes

Cleaning Wipes for Hands, Tools, and Surfaces

- Effectively removes various types of dirt: oil, lubricant, grease, rust, tar, bitumen, graphite, glues, resins, sealants, paints, inks, dyes, etc.
- Multi-purpose: can be used for cleaning hands, working tools and surfaces.
- Degreasing and antibacterial action. Does not require rinsing.
- Slightly abrasive and very resistant fabric.
- Dermatologically tested. Contains natural solvents.
- Eliminates unpleasant odours, leaving a pleasant citrus scent.
- Contains emollients (lanolin).



Art.-Nr.	Description	€			
TR1228.01	40 wipes	-	06	-	-
TR1229.01	100 wipes	-	04	-	-

Errecom Academy the know-how of our experts for you

Masterclasses, webinars, and on-site training courses designed to provide AC/R technicians with the specialist training they need to carry out the best system maintenance.

By joining Errecom Academy, you will meet our experts and members of the R&D department, who will share their know-how gained from years of study and research in the field and collaborations with the best OEMs in the industry.

Subscribe here





#madeinerrecom

follow us on



info@errecom.it - errecom.com

ERRECOM USA LLC

1900 North Bayshore Drive
1A Suite 129 - 33132 Miami
FLORIDA - USA

ERRECOM SPA

Via Industriale 14
25030 Corzano (Brescia)
ITALY

ERRECOM MDE

Regus Nassima Tower Office 408A
Sheikh Zayed Road
Trade Center District
DUBAI